

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>82707</b><br><b>W30B</b> | APP CRS<br><b>295°</b> | Rwy Ldg<br>TDZE <b>5599</b><br>Apt Elev <b>5673</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 30R  
ROCKY MOUNTAIN METRO (BJC)


**NA**

Baro-VNAV and VDP NA when using Denver Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Denver Intl altimeter setting and increase all DA 82 feet and all MDA 100 feet, increase LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¼ mile. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 ½ mile and LNAV Cat C/D visibility to 1 mile. For inoperative MALSR, when using Denver Intl altimeter setting, increase LPV all Cats visibility to 1 mile, LNAV/VNAV all Cats visibility to 1 ½ mile and LNAV Cat A/B visibility to 1 mile and Cat C/D visibility to 1 ¾ mile.


MALSR

MISSED APPROACH: Climb to 6300 then climbing right turn to 10300 direct HYGEM and hold, continue climb-in-hold to 10300.

|                       |                                        |                                            |                         |
|-----------------------|----------------------------------------|--------------------------------------------|-------------------------|
| ATIS<br><b>126.25</b> | DENVER APP CON<br><b>125.12 263.02</b> | METRO TOWER ★<br><b>118.6 (CTAF) 233.7</b> | GND CON<br><b>121.7</b> |
|-----------------------|----------------------------------------|--------------------------------------------|-------------------------|

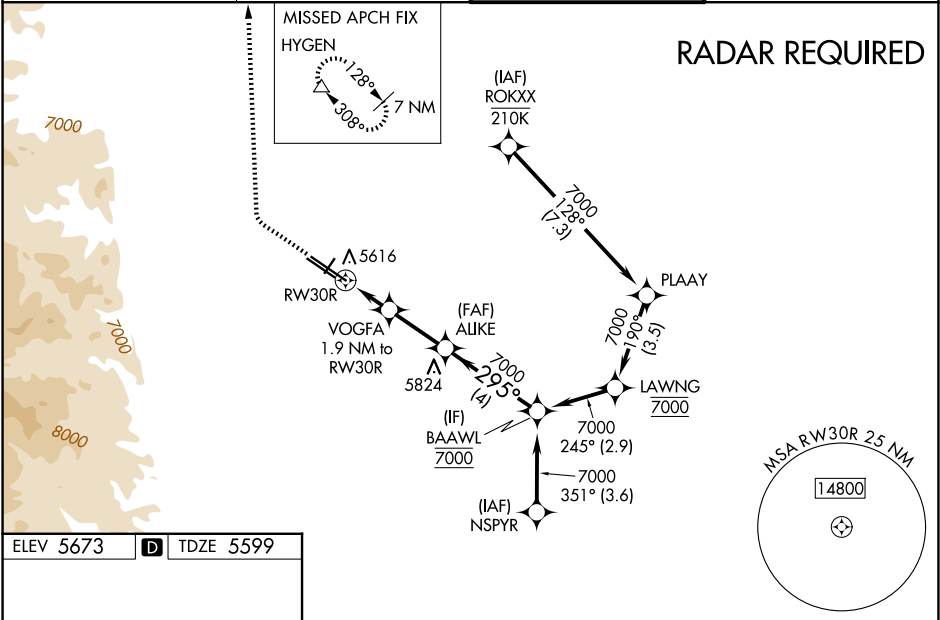

|           |          |           |
|-----------|----------|-----------|
| ELEV 5673 | <b>D</b> | TDZE 5599 |
|-----------|----------|-----------|

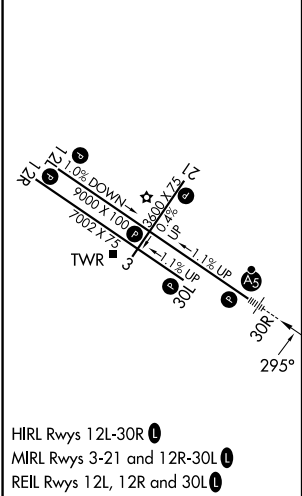

|              |                       |                       |                          |                         |
|--------------|-----------------------|-----------------------|--------------------------|-------------------------|
| 6300         | 10300                 | HYGEM                 | ALUKE                    | BAAWL                   |
|              |                       |                       | VOGFA<br>1.9 NM to RW30R |                         |
| *LNAV only.  |                       |                       |                          |                         |
|              |                       |                       |                          |                         |
| -1 NM        |                       | 0.9                   | 2.4 NM                   | 4 NM                    |
| CATEGORY     | A                     | B                     | C                        | D                       |
| LPV DA       | 5799-½                |                       | 200 (200-½)              |                         |
| LNAV/VNAV DA | 5900-⅝                |                       | 301 (300-⅝)              |                         |
| LNAV MDA     | 5940-½                | 341 (300-½)           | 5940-⅝                   | 341 (300-⅝)             |
| CIRCLING     | 6180-1<br>507 (600-1) | 6240-1<br>567 (600-1) | 6360-2<br>687 (700-2)    | 6860-3<br>1187 (1200-3) |

SW-1, 30 OCT 2025 to 27 NOV 2025

SW-1, 30 OCT 2025 to 27 NOV 2025