

DESTIN, FLORIDA

AL-5680 (FAA)

25107



WAAS CH 48923 W14A	APP CRS 143°	Rwy Idg 5001 TDZE 22 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 14
DESTIN EXEC (DTS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F).
Baro-VNAV and VDP NA when using Crestview altimeter setting. Rwy 14 helicopter visibility reduction below 3/4 SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crestview altimeter setting and increase all DA/MDA 80 feet; increase LPV all Cats visibility 1/2 SM, LNAV/VNAV all Cats visibility 3/4 SM, increase LNAV Cats C and D 1/2 SM, and Circling Cats C and D 1/4 SM.

MISSED APPROACH:
Climb to 2000 direct
AJUP and hold.

ATIS 133.925	EGLN APP CON 132.1 360.6	DESTIN TOWER ★ 118.45 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6 377.2	CLNC DEL 127.7 (When twr closed)
------------------------	------------------------------------	--	-------------------------	--------------------------------	---

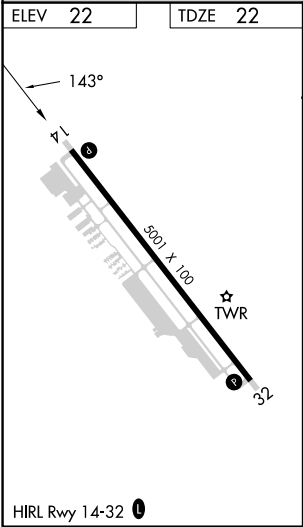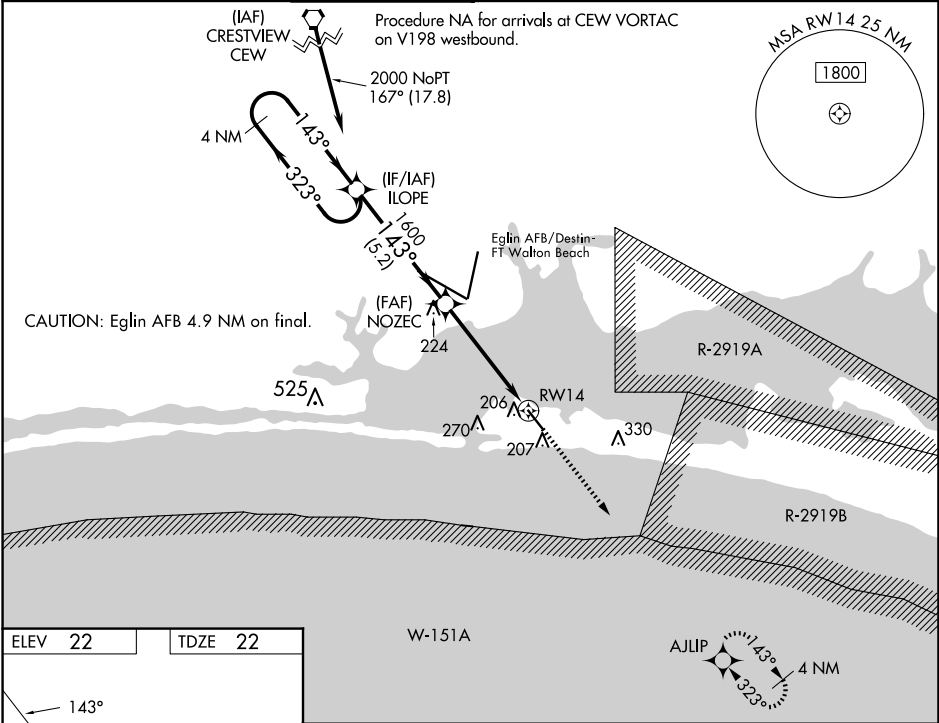

4 NM Holding Pattern		ILOPE		2000		AJLIP	
GP 3.00° TCH 43		NOZEC		1600		* LNAV only.	
← 323° 143° →		143°		* 1.2 NM to RW14		RW14	
5.2 NM		3.6 NM		1.2 NM			
CATEGORY	A	B	C	D			
LPV DA	272-1		250 (300-1)				
LNAV/ VNAV DA	367-1½		345 (400-1½)				
LNAV MDA	460-1	438 (500-1)	460-1¼	438 (500-1¼)			
CIRCLING	580-1	558 (600-1)	680-1¾ 658 (700-1¾)	680-2 658 (700-2)			

DESTIN, FLORIDA
Amdt 2C 07DEC17

30°24'N-86°28'W

DESTIN EXEC (DTS)
RNAV (GPS) RWY 14

SE-3, 30 OCT 2025 to 27 NOV 2025

SE-3, 30 OCT 2025 to 27 NOV 2025