RNAV (GPS) Y RWY 3
MADISON MUNI (IMS)

APP CRS	Rwy Ldg	5000
035°	TDZE	812
	Apt Elev	819

RNP APCH - GPS.

Rwy 3 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase *LNAV Cat C visibility and LNAV Cat visibility to 1⅜ SM. Circling NA for Cat C southeast of Rwy 3-21.

MALSF

MISSED APPROACH: Climbing right turn to 4000 direct GAMKE and hold, continue climb-in-hold to 4000.
* Missed approach requires minimum climb of 410 feet per NM to 1900.

AWOS-3	LOUISVILLE APP CON	UNICOM
119.175	132.075 327.0	123.0 (CTAF) L

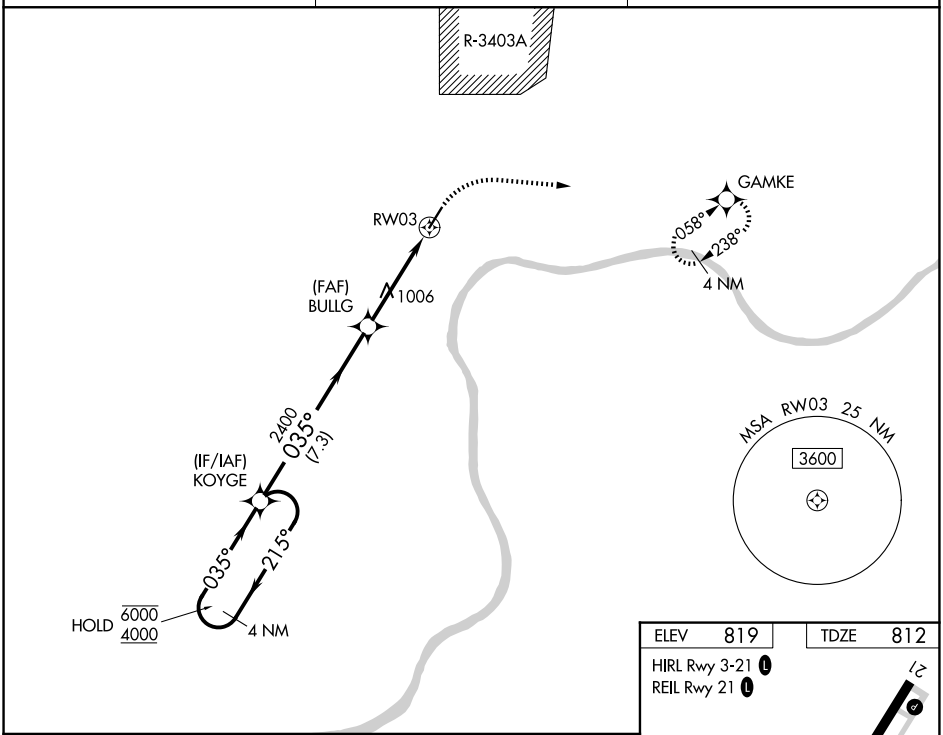

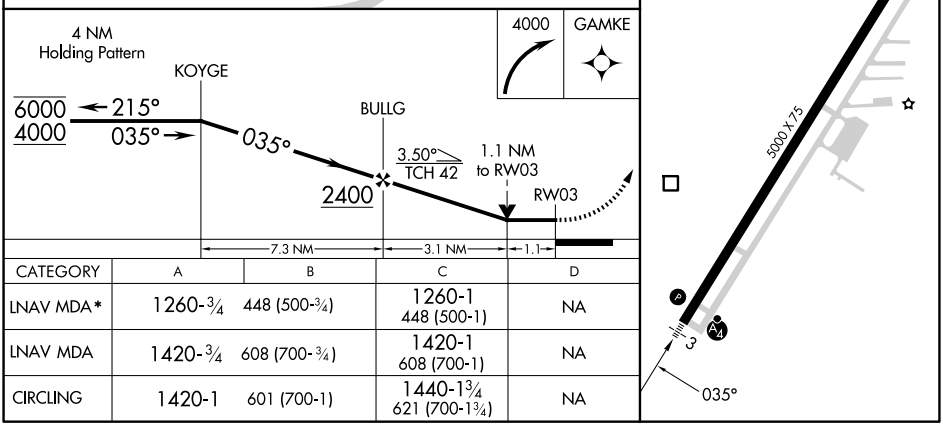

CATEGORY	A	B	C	D
LNAV MDA*	1260-¾ 448 (500-¾)		1260-1 448 (500-1)	NA
LNAV MDA	1420-¾ 608 (700-¾)		1420-1 608 (700-1)	NA
CIRCLING	1420-1 601 (700-1)		1440-1¾ 621 (700-1¾)	NA

EC-2, 30 OCT 2025 to 27 NOV 2025
EC-2, 30 OCT 2025 to 27 NOV 2025