

APP CRS	Rwy Idg	5005
058°	TDZE	9
	Apt Elev	9

RNAV (GPS) RWY 6

HARRY P WILLIAMS MEML (PTN)

RNP APCH.


▼

▲

Circling NA to Rwy 4W and 22W. Rwy 6 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use New Iberia altimeter setting and increase all MDA 100 feet; increase LNAV Cat C visibility ¼ SM and Circling Cat C visibility ½ SM. When VGSI inop, Straight-in/Circling Rwy 6 procedure NA at night.

MISSED APPROACH: Climb to 1700 direct GRICE and hold.

AWOS-3PT 134.575	NEW ORLEANS APP CON 124.3 350.35	CLNC DEL 124.3	UNICOM 122.8 (CTAF) 0
---------------------	-------------------------------------	-------------------	--------------------------

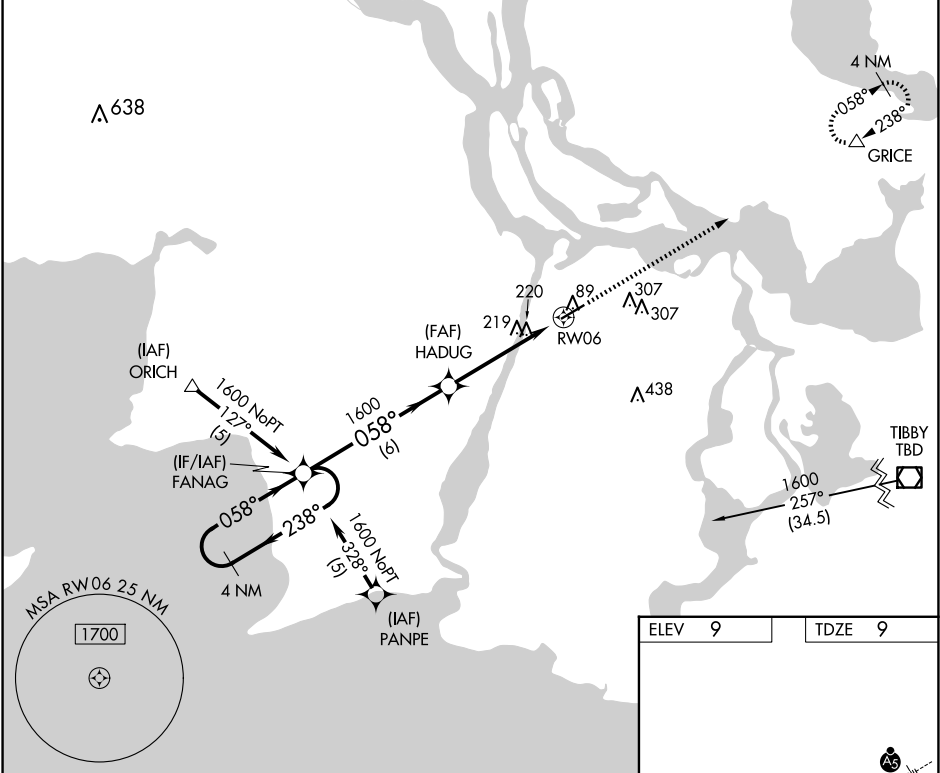

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

4 NM Holding Pattern


FANAG HADUG

1600 238° 058° 1600

3.03° TCH 45

6 NM 4.8 NM

CATEGORY	A	B	C	D
LNAV MDA	540-1	531 (600-1)	540-1½ 531 (600-1½)	NA
CIRCLING	540-1 531 (600-1)	660-1 651 (700-1)	660-1¾ 651 (700-1¾)	NA

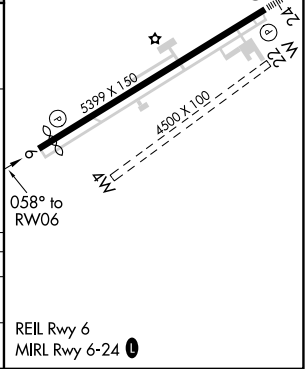

SC-4, 30 OCT 2025 to 27 NOV 2025

SC-4, 30 OCT 2025 to 27 NOV 2025