

WAAS
CH **72619**
W18A

APP CRS
183°

Rwy Idg **5404**
TDZE **173**
Apt Elev **173**

RNAV (GPS) RWY 18

FLETCHER FLD (CKM)

RNP APCH-GPS.


▼


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Tunica altimeter setting. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ½ SM. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2000 direct
HULON and hold.

AWOS-3 120.675	MEMPHIS CENTER 135.3 335.8	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

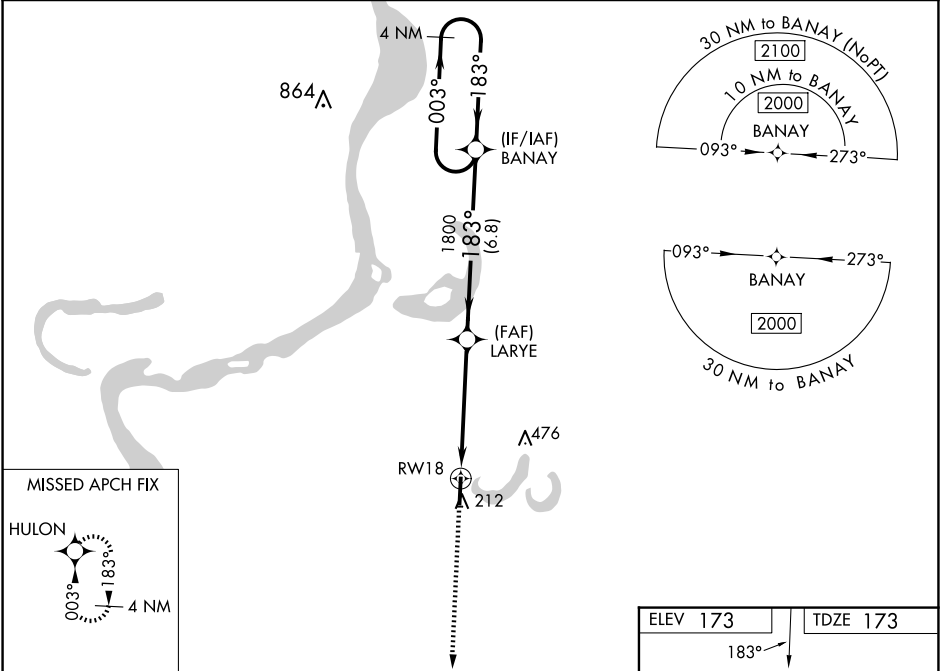

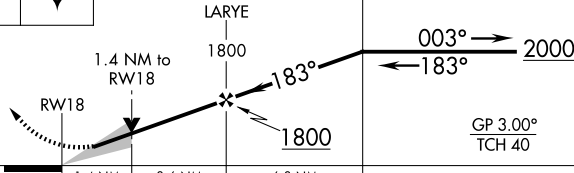2000	HULON	4 NM Holding Pattern			
					
					
CATEGORY		A	B	C	D
LPV DA		423-7/8 250 (300-7/8)			
LNAV/VNAV DA		587-13/8 414 (500-13/8)			
LNAV MDA		640-1	467 (500-1)	640-13/8	467 (500-13/8)
CIRCLING		740-1	567 (600-1)	780-13/4 607 (700-13/4)	780-2 607 (700-2)

