

WAAS CH 82403 W14A	APP CRS 138°	Rwy Idg TDZE Apt Elev	4650 1204 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 14

FREMONT MUNI (F'ET)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Blair altimeter setting and increase all DA/MDA 60 feet; increase LNAV/VNAV all Cats visibility ⅓ mile, and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Blair altimeter setting.

MISSED APPROACH:
Climb to 3800 direct HUSIV and hold.

AWOS-3 121.275	OMAHA APP CON 135.875 354.05	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

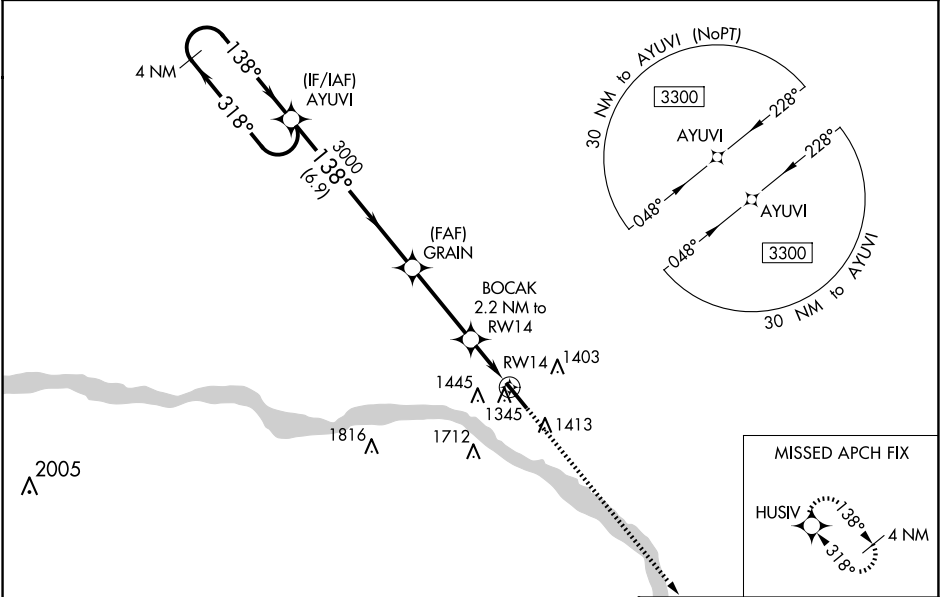

ELEV 1204

D

TDZE 1204

4 NM Holding Pattern

AYUVI

GRAIN

BOCAK 2.2 NM to RW14

HUSIV

3800

3300

3000

1940

1454-1

250 (300-1)

1496-1

292 (300-1)

1600-1

396 (400-1)

1600-1 1/8

396 (400-1 1/8)

2020-2 1/2

816 (900-2 1/2)

1760-1

556 (600-1)

GP 3.00°

TCH 40

6.9 NM

3.3 NM

1.1 NM

1.1 NM

RW14

*LNAV only

138°

318°

138°

138°

1260

635 X 100

REIL Rwy 14 0

MIRL Rwy 14-32

CATEGORY	A	B	C	D
LPV DA	1454-1	250 (300-1)		NA
LNAV/ VNAV DA	1496-1	292 (300-1)		NA
LNAV MDA	1600-1	396 (400-1)	1600-1 1/8 396 (400-1 1/8)	NA
C CIRCLING	1760-1	556 (600-1)	2020-2 1/2 816 (900-2 1/2)	NA