

WAAS CH 45507 W15A	APP CRS 153°	Rwy Ldg TDZE Apt Elev	6001 82 82
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 15




⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Orlando Intl altimeter setting. Inoperative table does not apply to LNAV/VNAV all Cats and LNAV Cat C. When local altimeter setting not received, use Orlando Intl altimeter setting and increase LPV DA all Cats to 309, LNAV/VNAV DA all Cats to 559, and all MDA 40 feet; increase LNAV/VNAV all Cats and Girding Cat C visibility ¼ mile.

MALSF



MISSED APPROACH: Climb to 2200 direct YARTU and on track 221° to TEMPE and hold

ATIS	ORLANDO APP CON	KISSIMEE TOWER ★	CLNC DEL	CLNC DEL	GND CON	UNICOM
128.775	119.4 351.9	124.45 (CTAF) 0	121.7	123.95 (When twr closed)	121.7	122.95

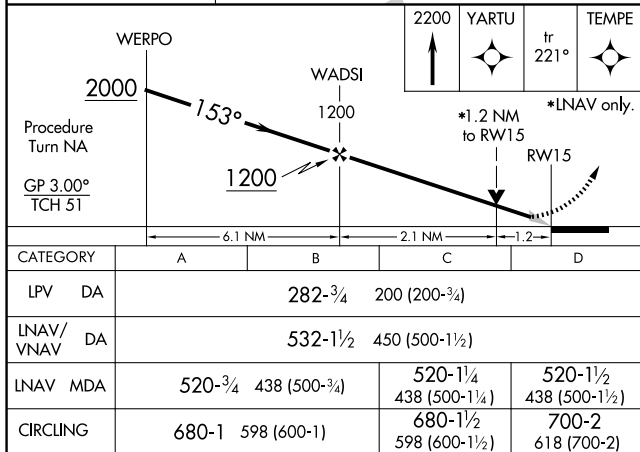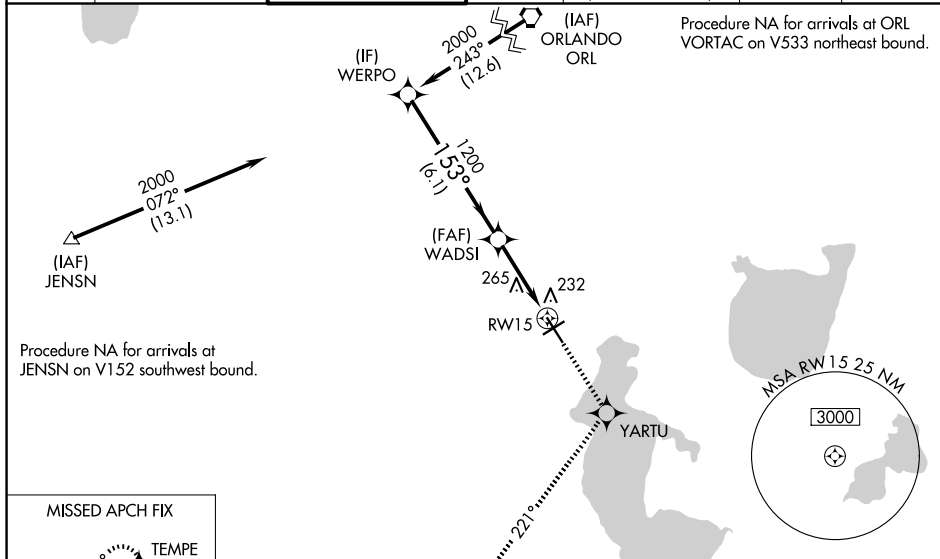

CATEGORY	A	B	C	D
LPV DA	282-¾ 200 (200-¾)			
RNAV/ VNAV DA	532-1½ 450 (500-1½)			
RNAV MDA	520-¾ 438 (500-¾)	520-1¼ 438 (500-1¼)	520-1½ 438 (500-1½)	
CIRCLING	680-1 598 (600-1)	680-1½ 598 (600-1½)	700-2 618 (700-2)	

