

WAAS CH 42900 W33A	APP CRS 333°	Rwy Ldg TDZE Apt Elev 6001 82 82
--	------------------------	--


RNAV (GPS) RWY 33

KISSIMMEE GATEWAY (ISM)

Baro-VNAV NA when using Orlando Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 43°C (109°F). Helicopter visibility reduction below ¼ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all LPV DA to 359, all LNAV/VNAV DA to 429, and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 540 then
climbing left turn to
2000 direct CAMBE
and hold.

ATIS 128.775	ORLANDO APP CON 119.4 351.9	KISSIMMEE TOWER ★ 124.45 (CTAF)	CLNC DEL 121.7	CLNC DEL 123.95 (When twr closed)	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	---	--------------------------	--	-------------------------	-------------------------

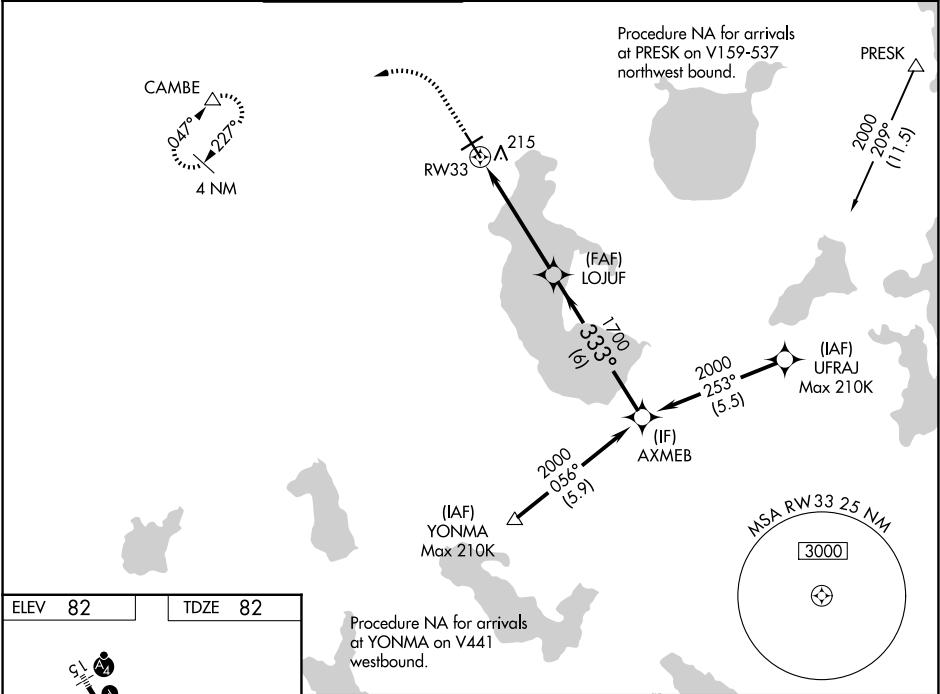

ELEV 82

TDZE 82

	540	2000	CAMBE		
				LOJUF	AXMEB
				1700	2000
				333°	
				1700	
				5 NM	6 NM
CATEGORY	A	B	C	D	
LPV DA	332-1 250 (300-1)				
LNAV/VNAV DA	402-1 320 (400-1)				
LNAV MDA	480-1 398 (400-1)		480-1½ 398 (400-1½)		
CIRCLING	620-1 538 (600-1)		680-1½ 700-2 598 (600-1½) 618 (700-2)		

SE-3, 30 OCT 2025 to 27 NOV 2025

SE-3, 30 OCT 2025 to 27 NOV 2025