


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 4400 |
| 267°    | TDZE     | 893  |
|         | Apt Elev | 894  |

RNAV (GPS) RWY 26

LAKEFIELD (CQA)

|                 |                                                                                                                                                                                                                                                    |                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| RNP APCH - GPS. |                                                                                                                                                                                                                                                    | MISSED APPROACH: Climb to 3000 direct EVOCO and on track 227° to COLMI and hold. |
| <div>▼</div>    | Baro-VNAV NA. Use AXV altimeter setting. When not received use DAY altimeter setting and increase LNAV/VNAV DA to 1349 feet and visibility all Cats ¼ SM, increase all MDA 80 feet and visibility Cat C ¼ SM. Helicopter visibility below ¾ SM NA. |                                                                                  |
| <div>▲</div> NA |                                                                                                                                                                                                                                                    |                                                                                  |

|              |                  |              |       |
|--------------|------------------|--------------|-------|
| AXV AWOS-3PT | COLUMBUS APP CON | UNICOM       | 123.3 |
| 128.325      | 134.45 352.05    | 122.8 (CTAF) |       |

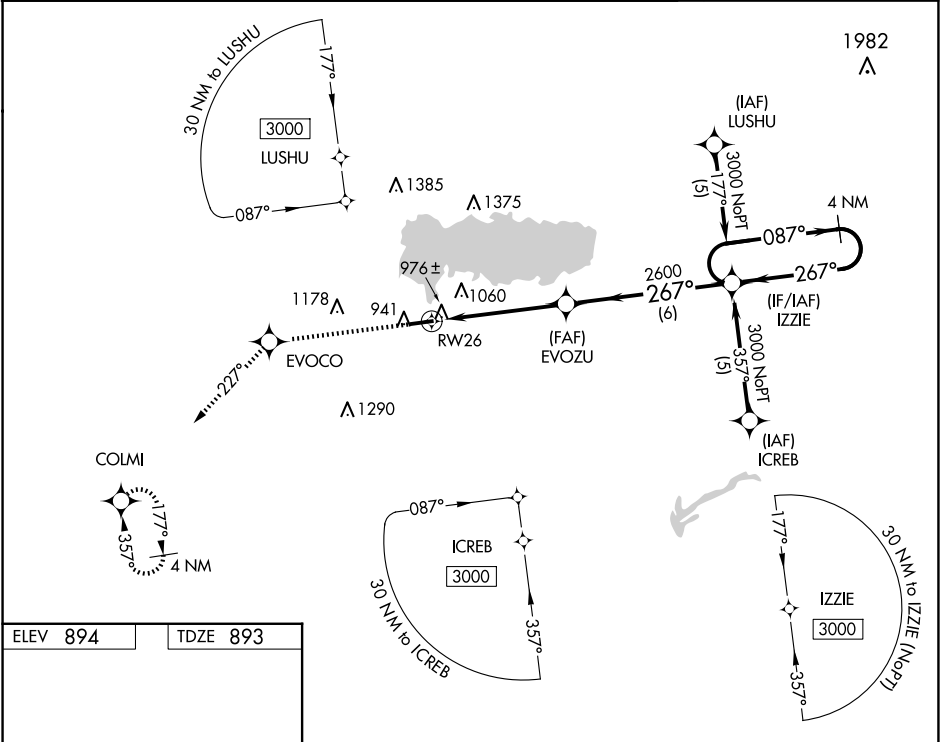

|                                                    |          |                                                                                                                                                                                  |                    |                      |    |
|----------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|----|
| ELEV 894                                           | TDZE 893 | <div>3000</div> <div>EVOZU</div> <div>tr 227°</div> <div>COLMI</div> <div>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).</div> <div>4 NM Holding Pattern</div> |                    |                      |    |
| <div>267°</div> <div>26</div> <div>4400 X 75</div> |          | <div>EVOZU</div> <div>2600</div> <div>267°</div> <div>IZZIE</div> <div>3000</div> <div>087°</div> <div>267°</div> <div>GP 3.20° TCH 40</div>                                     |                    |                      |    |
| <div>4.9 NM</div> <div>6 NM</div>                  |          |                                                                                                                                                                                  |                    |                      |    |
| CATEGORY                                           |          | A                                                                                                                                                                                | B                  | C                    | D  |
| LNAV/VNAV DA                                       |          | 1277-1¼ 384 (400-1¼)                                                                                                                                                             |                    |                      | NA |
| LNAV MDA                                           |          | 1260-1 367 (400-1)                                                                                                                                                               |                    |                      | NA |
| CIRCLING                                           |          | 1360-1 466 (500-1)                                                                                                                                                               | 1400-1 506 (600-1) | 1520-1¾ 626 (700-1¾) | NA |