
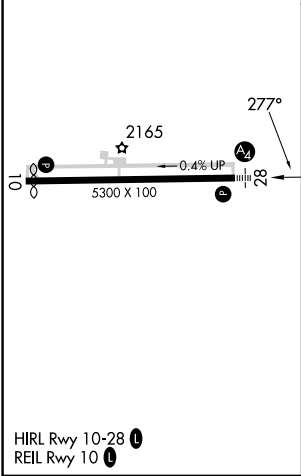



|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>49102</b><br><b>W28A</b> | APP CRS<br><b>277°</b> | Rwy Idg<br>TDZE <b>2111</b><br>Apt Elev <b>2125</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 28

WELLSVILLE MUNI/TARANTINE FLD (ELZ)

|                                                                                                                              |                                    |                        |                                                       |
|------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                                                              |                                    | MALS                   | MISSED APPROACH: Climb to 4300 direct NEVGE and hold. |
| Inop table does not apply to LPV and LNAV/VNAV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. |                                    |                        |                                                       |
| ASOS<br>119.275                                                                                                              | CLEVELAND CENTER<br>124.325 353.85 | UNICOM<br>123.0 (CTAF) |                                                       |

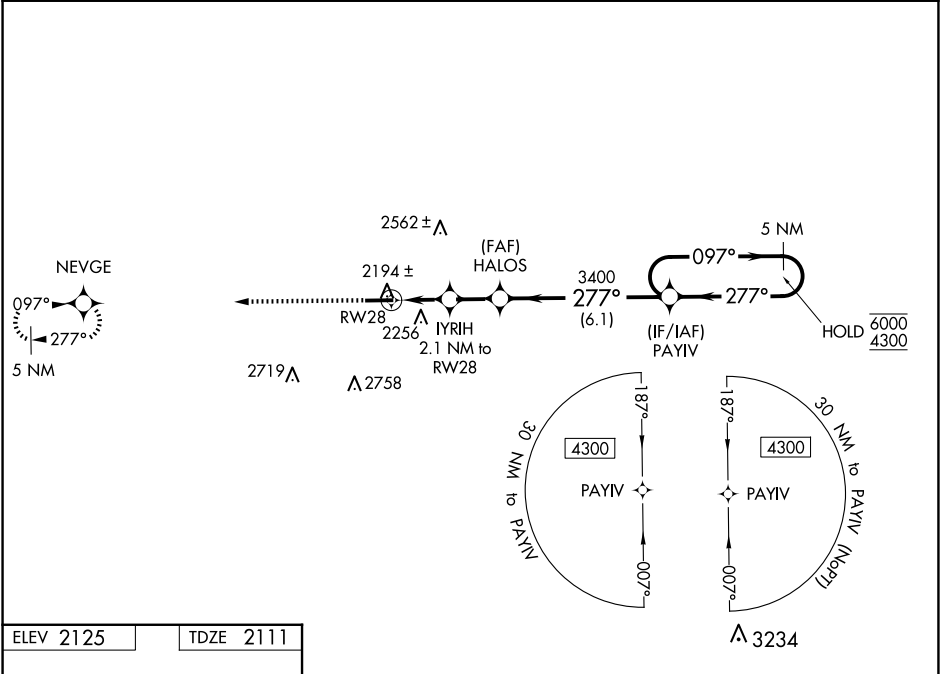
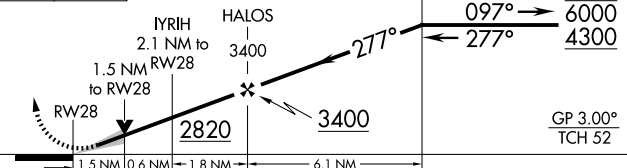
|                                                                                              |                       |                                                                                     |                               |                        |  |
|----------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------------------------------------------|-------------------------------|------------------------|--|
| 4300 NEVGE                                                                                   |                       | 5 NM Holding Pattern                                                                |                               |                        |  |
|           |                       |  |                               |                        |  |
|                                                                                              |                       | GP 3.00°<br>TCH 52                                                                  |                               |                        |  |
| CATEGORY                                                                                     | A                     | B                                                                                   | C                             | D                      |  |
| LPV DA                                                                                       | 2311-3/4              |                                                                                     | 200 (200-3/4)                 |                        |  |
| LNAV/<br>VNAV DA                                                                             | 2369-3/4              |                                                                                     | 258 (300-3/4)                 |                        |  |
| LNAV MDA                                                                                     | 2460-3/4              | 349 (400-3/4)                                                                       | 2460-1/4                      | 349 (400-1/4)          |  |
|  CIRCLING | 2640-1<br>515 (600-1) | 2660-1<br>535 (600-1)                                                               | 2880-2 1/4<br>755 (800-2 1/4) | 3060-3<br>935 (1000-3) |  |