

WAAS CH 82618 W15A	APP CRS 151°	Rwy Idg TDZE Apt Elev	6001 121 121
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

LINCOLN RGNL/KARL HARDER FLD (LHM)

RNP APCH

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.


▲

VDP and Baro-VNAV NA when using Beale AFB altimeter setting. When local altimeter setting not received, use Beale AFB altimeter setting and increase LPV DA to 361 feet; increase LNAV/VNAV DA to 492 feet; increase all MDAs 40 feet and increase Circling Cat D visibility ¼ SM. For inop ALS when using Beale AFB altimeter setting, increase LNAV Cat D visibility to 1¼.


MALSR

MISSED APPROACH:
Climb to 2500 direct
MUCGU and on track
131° to ROZZY and
hold.

AWOS-3 124.25	NORCAL APP CON 125.4 259.1	UNICOM 123.0 (CTAF) 0
-------------------------	--------------------------------------	---------------------------------

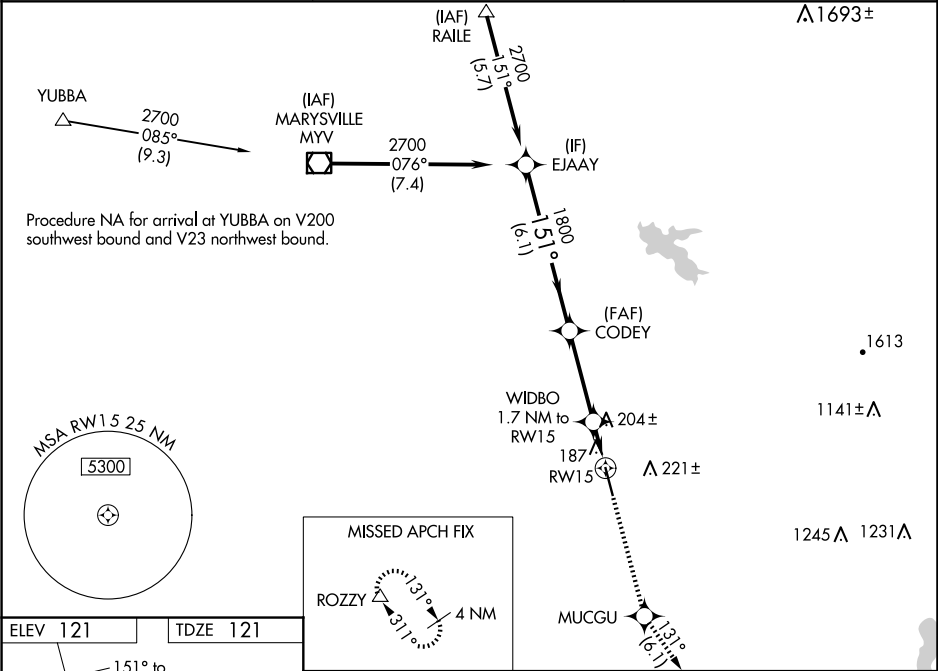

ELEV 121	TDZE 121
-----------------	-----------------

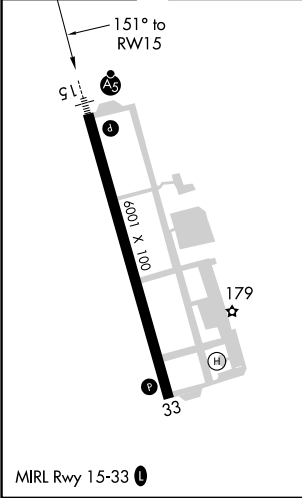

--	--	--	--

SW-2, 30 OCT 2025 to 27 NOV 2025

SW-2, 30 OCT 2025 to 27 NOV 2025