

WAAS CH 56602 W25A	APP CRS 248°	Rwy Ldg 5004 TDZE 949 Apt Elev 949
--	------------------------	---

RNAV (GPS) RWY 25

GREENE COUNTY/LEWIS A JACKSON RGNL (GDK)

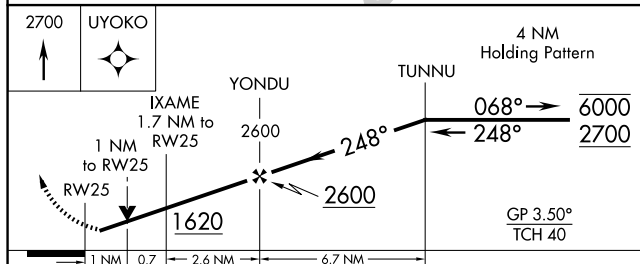
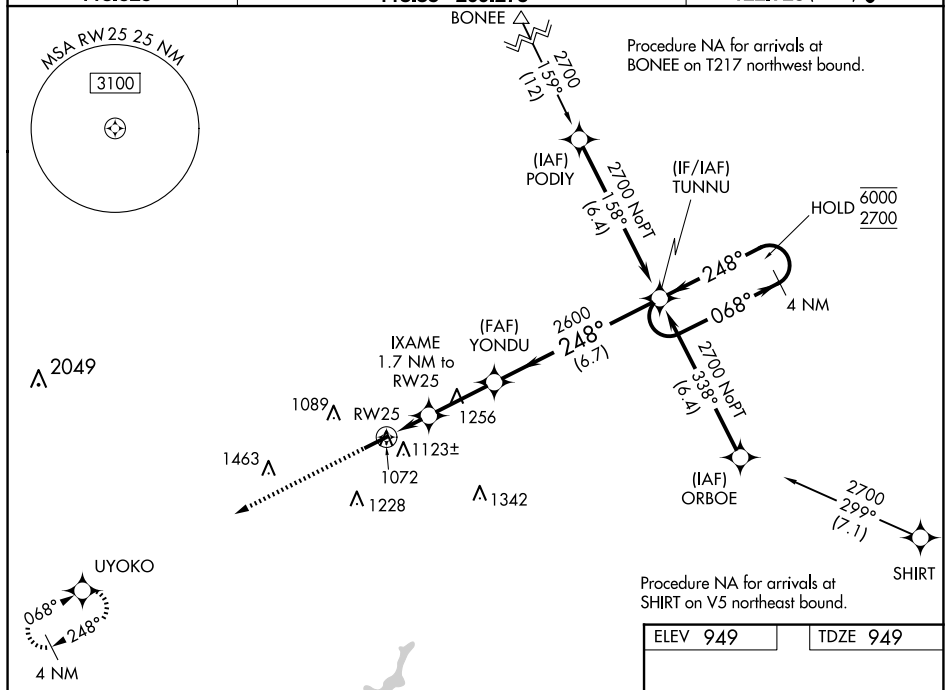
RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
A Rwy 25 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using
 Dayton/Wright Brothers altimeter setting. When local altimeter setting not received, use
 Dayton/Wright Brothers altimeter setting: increase LPV DA to 1249 feet; increase LNAV/VNAV
 DA to 1252 feet; increase all MDA 40 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 2700 direct
UYOKO and hold.

AWOS-3
118.525

COLUMBUS APP CON
118.85 269.275

UNICOM
122.725 (CTAF) **L**

CATEGORY	A	B	C	D
LPV DA	1219-1	270 (300-1)		NA
LNAV/ VNAV DA	1222-1	273 (300-1)		NA
LNAV MDA	1340-1	391 (400-1)	1340-1 $\frac{1}{8}$ 391 (400-1 $\frac{1}{8}$)	NA
C CIRCLING	1480-1	531 (600-1)	1560-1 $\frac{3}{4}$ 611 (700-1 $\frac{3}{4}$)	NA

