

WAAS CH 86447 W15A	APP CRS 149°	Rwy Ldg TDZE Apt Elev	3848 805 811
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

INDIANAPOLIS METRO (UMP)

RNP APCH - GPS.



▼

Baro-VNAV and VDP NA when using IND altimeter setting. Rwy 15 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1098 feet. Increase LNAV/VNAV DA to 1173 feet; increase all MDAs 60 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH:

Climb to 2900 direct INOYO and hold.

AWOS-3PT 119.375	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 121.625	UNICOM 123.0 (CTAF) 0
----------------------------	---	----------------------------	--

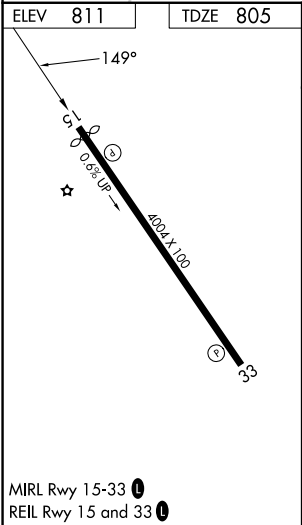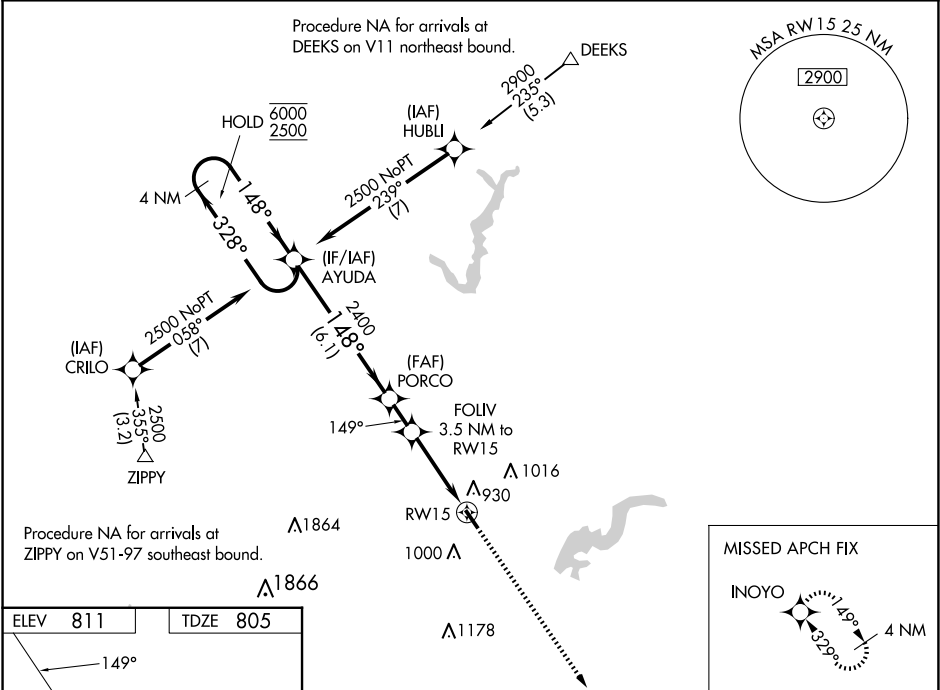

4 NM Holding Pattern				2900	INOYO
AYUDA 6000 2500 328° 148° 148°				↑	
GP 3.00° TCH 43				✧	
PORCO 2400 148° 149°				1.3 NM to RW15	
FOLIV 1940 149° 3.5 NM to RW15				RW15	
6.1 NM 1.4 NM 2.2 NM 1.3 NM					
CATEGORY	A	B	C	D	
LPV DA	1055-1		250 (300-1)		NA
LNAV/VNAV DA	1130-1		325 (400-1)		NA
LNAV MDA	1240-1	435 (500-1)		1240-1¼ 435 (500-1¼)	NA
CIRCLING	1320-1 509 (600-1)	1340-1 529 (600-1)	1340-1½ 529 (600-1½)		NA