

APP CRS
060°

Rwy Idg
TDZE
631

Apt Elev
632

RNAV (GPS) RWY 6

HEBER SPRINGS MUNI (HBZ)

RNP APCH.

▼

▲NA

Procedure NA at night. Rwy 6 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Batesville altimeter setting and increase all MDAs 80 feet, and increase LNAV visibility Cat C and D ¼ SM. Increase Circling visibility Cat C ¼ SM, Cat D ½ SM.


MISSED APPROACH: Climb to 4000 direct POYOG and hold, continue climb-in hold 4000.

MEMPHIS CENTER

126.85 281.55

UNICOM

122.7 (CTAF) **0**

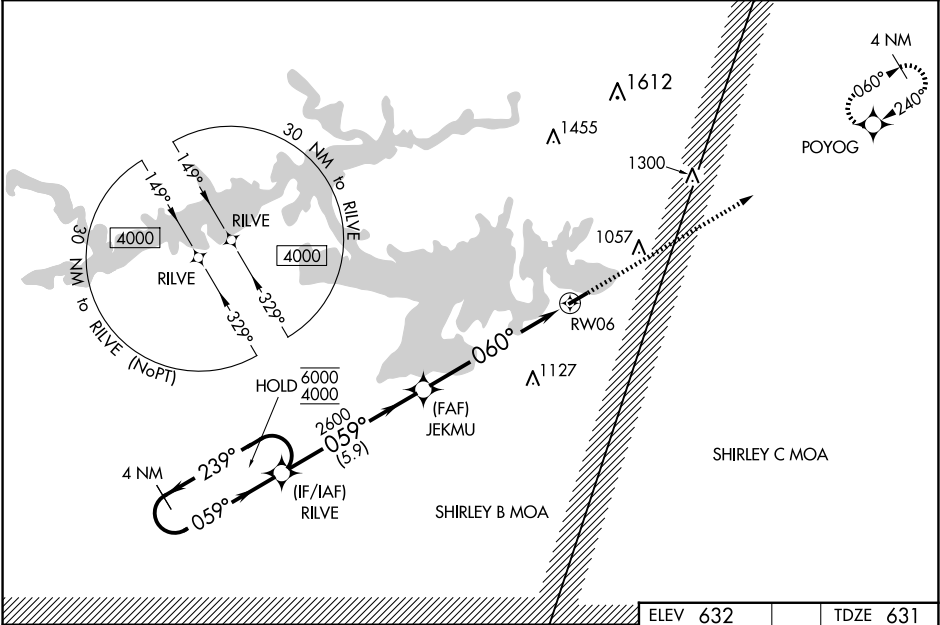

ELEV 632

TDZE 631

4 NM Holding Pattern

RILVE

JEKMU

RW06

POYOG

4000

6000

4000

239°

059°

059°

060°

2600

3.00°

TCH 36

5.9 NM

6.1 NM

CATEGORY	A	B	C	D
LNAV MDA	1240-1	609 (700-1)	1240-1¾	609 (700-1¾)
CIRCLING	1240-1 608 (700-1)	1380-1 748 (800-1)	1380-2¼ 748 (800-2¼)	1440-2½ 808 (900-2½)

MIRL Rwy 6-24 **0**

REIL Rwys 6 and 24 **0**