

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>69205</b><br><b>W17A</b> | APP CRS<br><b>170°</b> | Rwy Idg<br>TDZE <b>763</b><br>Apt Elev <b>763</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 17

HURON COUNTY MEML (BAX)

RNP APCH.


▼

Baro-VNAV NA when using MBS Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS Intl altimeter setting and increase all DA 129 feet and all MDA 140 feet, increase LPV all Cats visibility ¾ mile; increase LNAV Cat C ½ mile. Rwy 17 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:

Climb to 3000 direct AREBE and hold.

|                        |                                          |                                   |
|------------------------|------------------------------------------|-----------------------------------|
| AWOS-3<br><b>118.6</b> | CLEVELAND CENTER<br><b>127.7 290.425</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|------------------------|------------------------------------------|-----------------------------------|

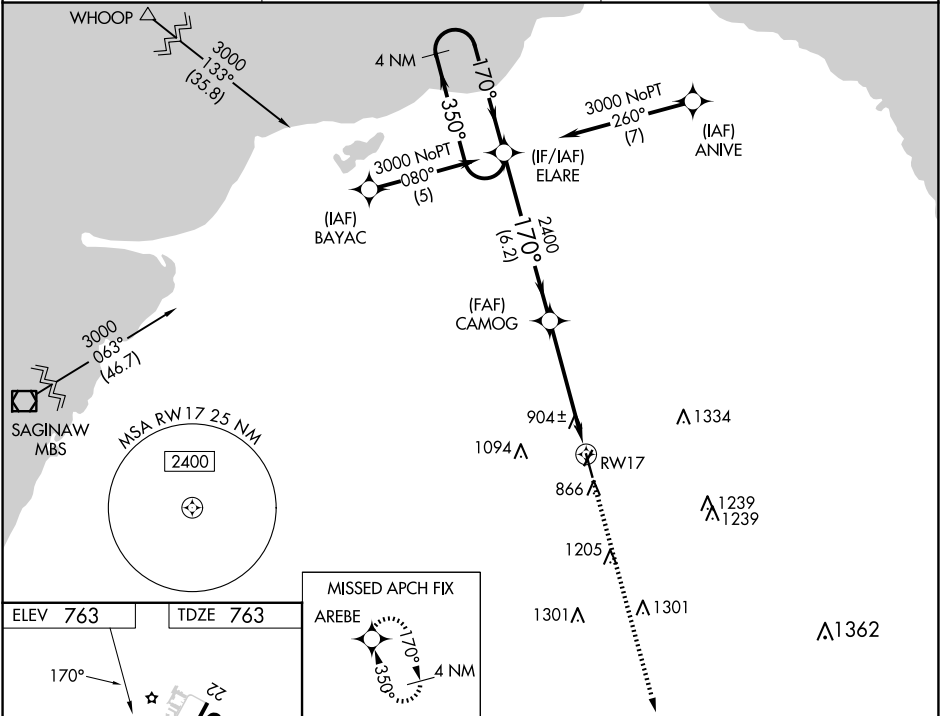

ELEV 763 TDZE 763

REIL Rws 17 and 35 1  
MIRL Rws 4-22 and 17-35 1

|                            |                    |             |                         |        |        |
|----------------------------|--------------------|-------------|-------------------------|--------|--------|
| 4 NM Holding Pattern ELARE |                    |             |                         | 3000   | AREBE  |
| GP 3.00° TCH 40            |                    |             |                         | RW17   |        |
|                            |                    |             |                         | 6.2 NM | 4.9 NM |
| CATEGORY                   | A                  | B           | C                       | D      |        |
| LPV DA                     | 1075-1 312 (400-1) |             |                         | NA     |        |
| LNAV/VNAV DA               | 1352-2 589 (600-2) |             |                         | NA     |        |
| LNAV MDA                   | 1220-1             | 457 (500-1) | 1220-1¼<br>457 (500-1¼) | NA     |        |