

LOC/DME I-FFC 111.95 Chan 56(Y)	APP CRS 313°	Rwy Idg TDZE Apt Elev 5118 807 808	ILS or LOC RWY 31 ATLANTA RGNL FALCON FLD (F'F'C)
---	------------------------	--	--

DME or ADF or RADAR required.

▼


▲

Circling Rwy 13 NA at night. Rwy 31 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to S-ILS 31 and to S-LOC 31 Cats C/D.

ODALS

MISSED APPROACH: Climb to 1700 then climbing left turn to 4000 on heading 275° and LGC VORTAC R-047 to TIROE INT/LGC 23 DME and hold.


ASOS 118.525	ATLANTA APP CON 119.8 354.125	CLNC DEL 119.8	UNICOM 123.05 (CTAF) 0
------------------------	---	--------------------------	----------------------------------

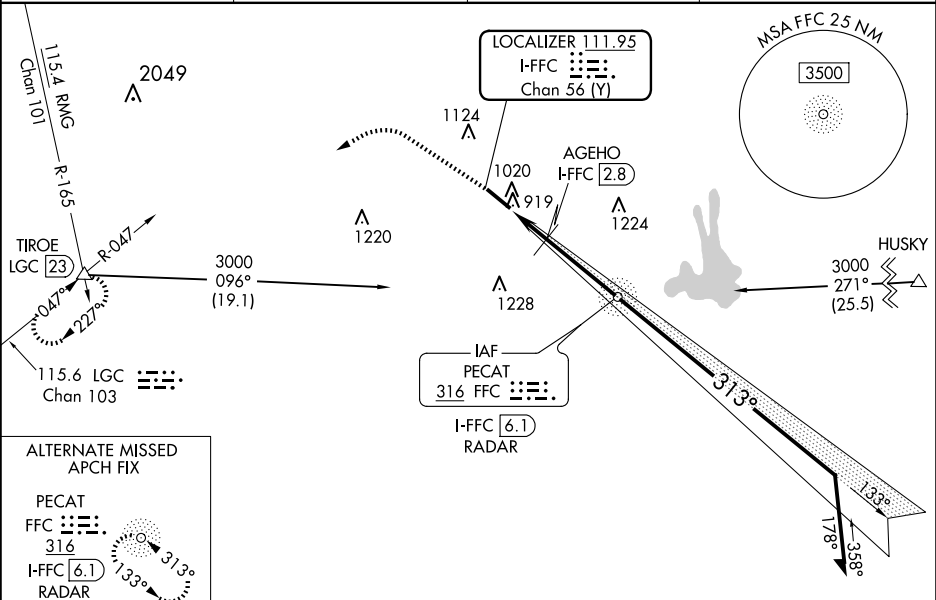

ELEV 808

D

TDZE 807



REIL Rwy 13

MIRL Rwy 13-31

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

1700

↑

4000

hdg 275°

LGC R-047

TIROE

△

FFC NDB
PECAT
I-FFC 6.1
RADAR

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00°/TCH 45).
Remain within 10 NM

AGEHO I-FFC 2.8

I-FFC 2

I-FFC 1

1320

2467

133°

313°

2500

2500

GS 3.00°
TCH 38

1 NM

0.8

3.3 NM

CATEGORY	A	B	C	D
S-ILS 31	1059-¾		252 (300-¾)	
S-LOC 31	1320-¾ 513 (600-¾)		1320-1¾ 513 (600-1¾)	
CIRCLING	1320-1 512 (600-1)		1440-1¾ 1540-2¼ 632 (700-1¾) 732 (800-2¼)	
AGEHO FIX MINIMUMS (DME REQUIRED)				
S-LOC 31	1180-¾ 373 (400-¾)		1180-1 373 (400-1)	
CIRCLING	1320-1 512 (600-1)		1440-1¾ 1540-2¼ 632 (700-1¾) 732 (800-2¼)	