

WAAS CH 70536 W25A	APP CRS 255°	Rwy Idg 4001 TDZE 1065 Apt Elev 1067
--	------------------------	---


RNAV (GPS) RWY 25

ELKIN MUNI (ZEF)


- T** Obtain local altimeter setting on CTAF; when not received, use Mount Airy altimeter setting and increase MDA 80 ft and LP and Circling Cats C/D visibility ¼ mile. DME/DME RNP-0.3 NA. Procedure NA at night.
- A NA** Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4900 direct ZOVMI and hold, continue climb-in-hold to 4900.

ATLANTA CENTER	UNICOM
125.15 263.0	123.05 (CTAF) 0

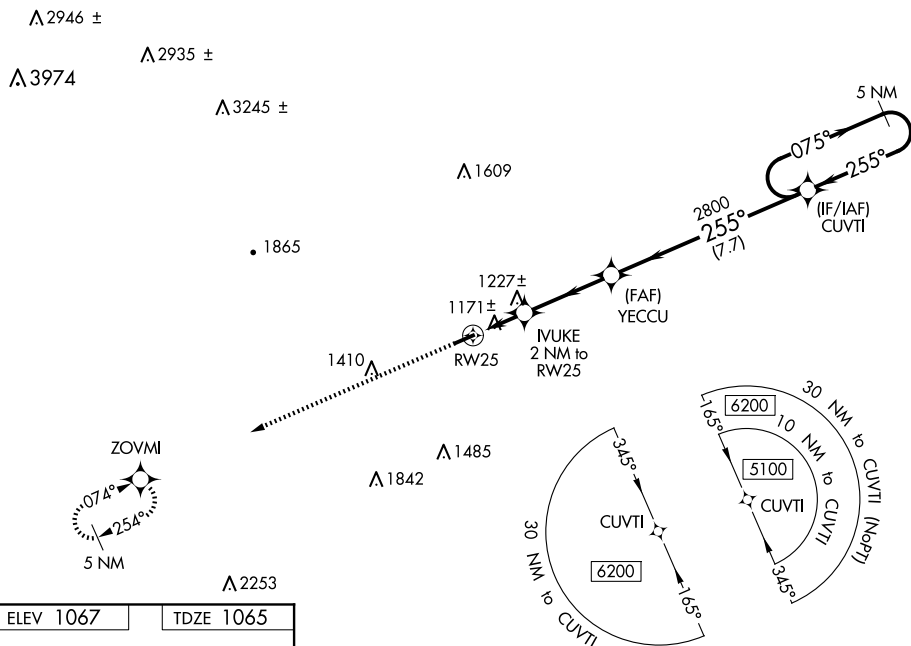

ELEV 1067		TDZE 1065
-----------	--	-----------



MIRL Rwy 7-25 **L**
REIL Rwy 7 and Rwy 25 **L**

Visual Segment - Obstacles.

4900

ZOVMI

5 NM Holding Pattern

CUVTI

075°

255°

5100

IVUKE 2 NM to RW25

YECCU

2800

1720

RW25

2 NM

3.4 NM

7.7 NM

CATEGORY	A	B	C	D
LP MDA	1440-1	375 (400-1)	1440-1 $\frac{1}{8}$	375 (400-1 $\frac{1}{2}$)
LNAV MDA	1480-1	415 (500-1)	1480-1 $\frac{3}{8}$	415 (500-1 $\frac{3}{4}$)
CIRCLING	1540-1 473 (500-1)	1600-1 533 (600-1)	1680-1 $\frac{3}{4}$ 613 (700-1 $\frac{1}{4}$)	1840-2 $\frac{1}{2}$ 773 (800-2 $\frac{1}{2}$)

ELKIN MUNI (ZEF)
RNAV (GPS) RWY 25