



APP CRS	Rwy Idg	5000
301°	TDZE	1070
	Apt Elev	1086

RNAV (GPS) RWY 30

MONROE MUNI (EFT)

RNP APCH-GPS.	MISSED APPROACH: Climbing left turn to 3000 direct DAVIS and hold.
When local altimeter setting not received, use Albetus altimeter setting and increase all MDA 100 feet, increase LNAV Cat C/D and Circling Cat C visibility ¼ mile. VDP NA when using Albetus altimeter setting. Rwy 30 helicopter visibility reduction below ¾ SM NA. Circling to Rwy 2-20 NA at night.	

AWOS-3 118.375	ROCKFORD APP CON 126.0 327.0	UNICOM 123.05 (CTAF) 0
-------------------	---------------------------------	---------------------------

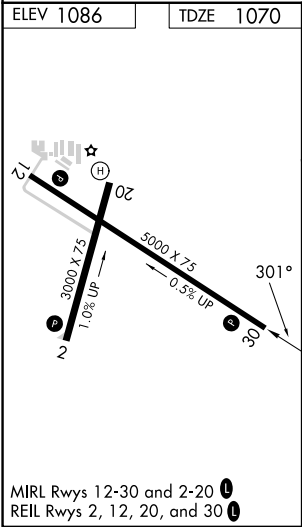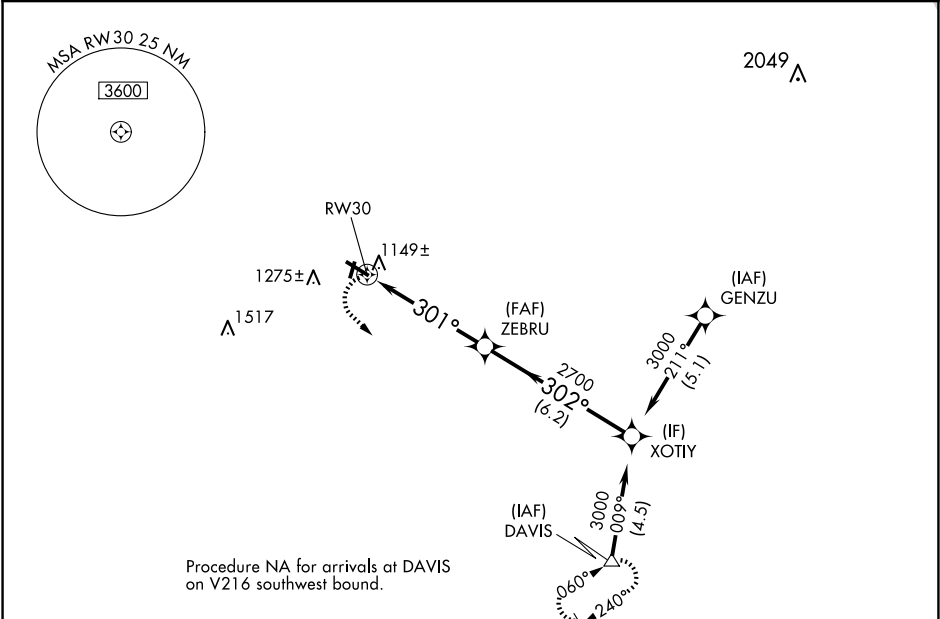

3000 DAVIS

XOTIY 3000

ZEBRU 2700

1.2 NM to RW30

301°

302°

3.04° TCH 42

1.2 3.8 NM 6.2 NM

Procedure Turn NA

CATEGORY	A		B		C		D	
LNAV MDA	1480-1 410 (400-1)		1480-1¼ 410 (400-1¼)					
CIRCLING	1540-1 454 (500-1)		1640-1 554 (600-1)		1640-1½ 554 (600-1½)		1640-2 554 (600-2)	