

WAAS
CH **88239**
W05B

APP CRS
047°

Rwy Ldg
TDZE
Apt Elev
5000
8
8

RNAV (GPS) Y RWY 5
NAPLES MUNI (APF')

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 50°C.

MISSED APPROACH: Climb to 500 then climbing right turn to 2100 direct EVRGD and hold.

ATIS 134.225	FORT MYERS APP CON★ 119.75 371.85 (W) 124.125 371.85 (E)	NAPLES TOWER★ 128.5 (CTAF) 0	GND CON 121.6
------------------------	--	--	-------------------------

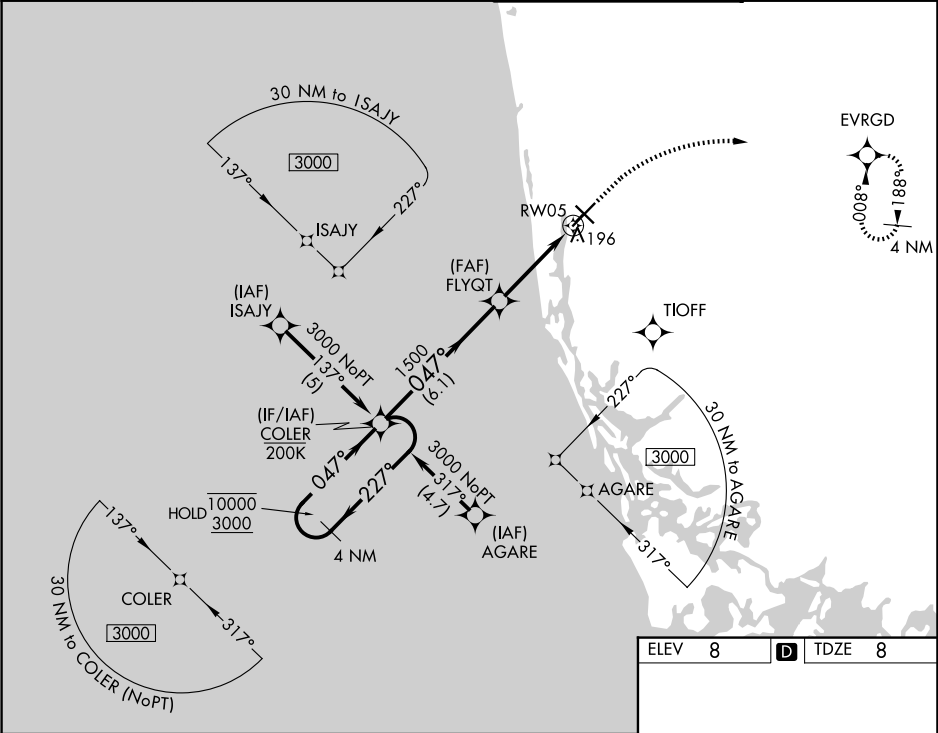

4 NM
Holding Pattern

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.50/TCH 31).

500 2100 EVRGD

10000 3000

←227° 047°→

GP 3.50° TCH 40

COLER

FLYQT

1500

1.1 NM to RWY05

RWY05

6.1 NM 2.8 NM 1.1 NM

CATEGORY	A	B	C	D
LPV DA		278-1	270 (300-1)	
LNAV/VNAV DA		357-1	349 (400-1)	
LNAV MDA	460-1	452 (500-1)	460-1 ³ / ₈ 452 (500-1 ³ / ₈)	
CIRCLING	500-1	492 (500-1)	620-1 ³ / ₄ 612 (700-1 ³ / ₄)	760-2 ¹ / ₂ 752 (800-2 ¹ / ₂)

REIL Rwy 5, 14, 23 and 32 0

MIRL Rwy 5-23 and 14-32 0