

LOC/DME I-CIX 110.55 Chan 42 (Y)	APP CRS 176°	Rwy Ldg 13401 13400 TDZE 602 606 Apt Elev 606 606	ILS or LOC RWY 18L DALLAS-FORT WORTH INTL (DFW)	
--	------------------------	--	--	--

RADAR required for procedure entry. DME or RADAR required.


Simultaneous approach authorized with Rwy 17L/C/R. For inop ALS, increase S-LOC 18L Cat C/D and Sidestep 18R Cat C/D visibility to 1¾ mile. Inop table does not apply to Sidestep 18R Cots A and B.

Rwy 18L
MALSR

Rwy 18R
ALSF-2

MISSED APPROACH: Climb to 1100, then climbing right turn to 3000 on heading 245° and FUZ VORTAC R-222 to LIKES INT/FUZ 27 DME and hold.

D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 118.425	DFW TOWER 126.55 127.5 124.15 134.9 EAST WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25	CPDLC
--	-------------------------------------	---	---	---------------------------	-------

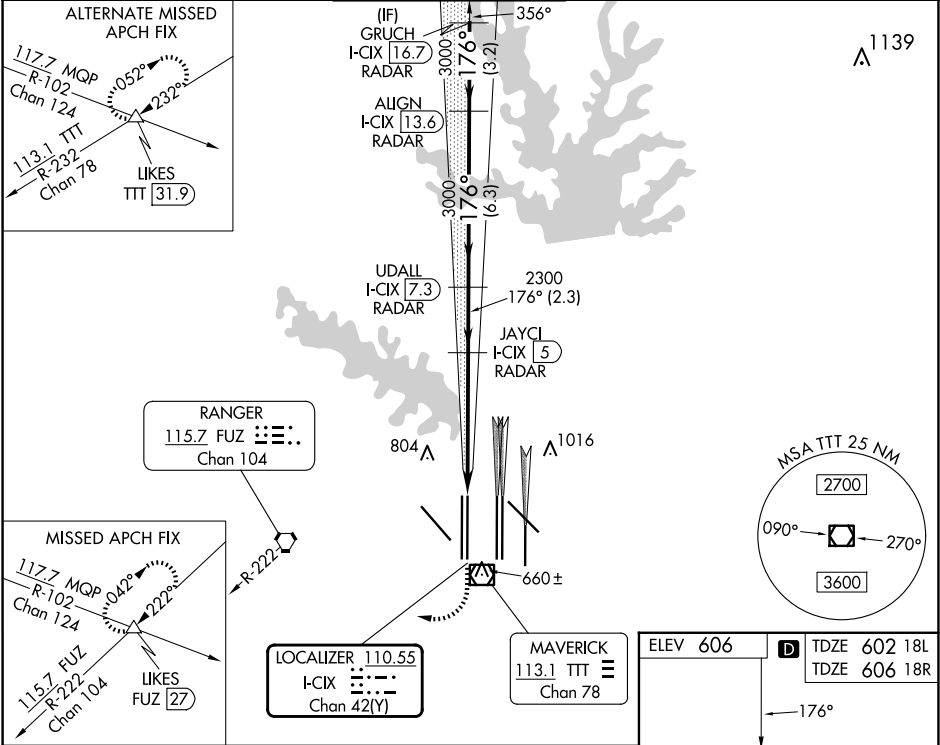

1100 ↑	3000 hdg 245°	FUZ R-222	LIKES △				
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).							
*LOC only.							
CATEGORY	A	B	C	D			
S-ILS 18L	802/18					200 (200-½)	
S-LOC 18L	1220/24	618 (700-½)	1220-1¾	618 (700-1¾)			
SIDESTEP 18R	1220/50	614 (700-1)	1220-1¾	614 (700-1¾)	1220-1½	614 (700-1½)	

