
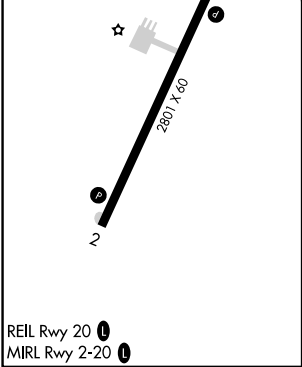


APP CRS	Rwy Idg	2801
199°	TDZE	1116
	Apt Elev	1116

RNAV (GPS) RWY 20
JAMES G WHITING MEML FLD (MEY)

RNP APCH - GPS.	
▼ ▲ NA Procedure NA at night. Rwy 20 helicopter visibility reduction below 1 SM NA. Use Sioux City altimeter setting, when not received use Denison altimeter setting and increase all MDAs 20 feet and increase visibility LNAV Cat C ½ SM and visibility Circling Cat C ¼ SM.	MISSED APPROACH: Climb to 3100 direct UPYAN and hold.

SUX ASOS 119.45 270.8	SIoux CITY APP CON★ 124.6 307.0	UNICOM 122.8 (CTAF) 0
--------------------------	------------------------------------	--------------------------

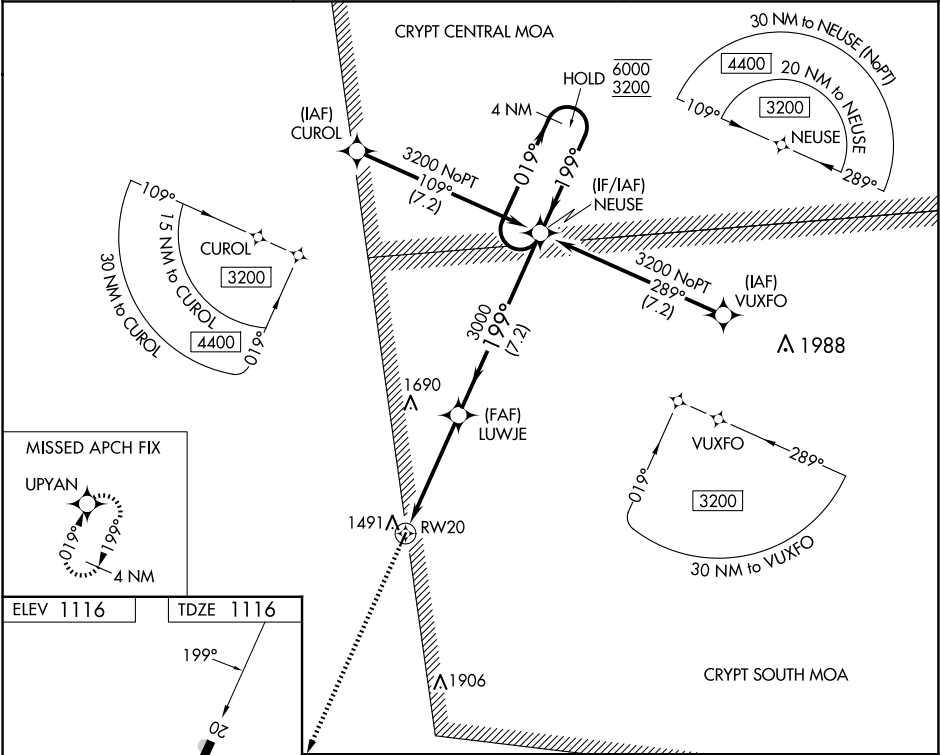

3100

UPYAN

NEUSE

4 NM Holding Pattern

019°

199°

6000

3200

LUWJE

3000

199°

3.75°

TCH 37

RW20

4.6 NM

7.2 NM

CATEGORY	A	B	C	D
LNAV MDA	1860-1 744 (800-1)	1860-1¼ 744 (800-1¼)	1860-2 744 (800-2)	NA
CIRCLING	1880-1 764 (800-1)	1940-1¼ 824 (900-1¼)	1980-2½ 864 (900-2½)	NA