
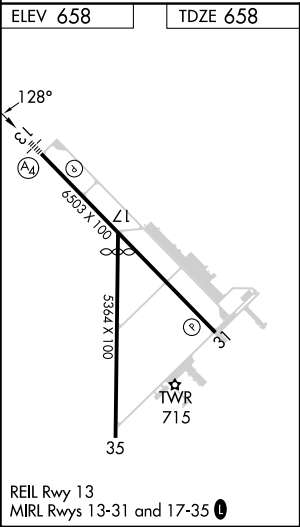


WAAS CH 82435 W13A	APP CRS 128°	Rwy Idg TDZE Apt Elev	6503 658 658
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

NEW BRAUNFELS NTL (BAZ)

RNP APCH					MALS A4 ≡	MISSED APPROACH: Climb to 3500 direct NUMMO and hold, continue climb-in-hold to 3500.	
	When local altimeter setting not received, use San Marcos Rgnl altimeter setting; increase LPV DA to 951 feet, LNAV/VNAV DA to 1169 feet; increase all MDAs 60 feet and visibility LNAV and Circling Cat C/D ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using San Marcos altimeter setting. For inop ALS, increase LNAV/VNAV visibility to 1 ½ SM. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS when using San Marcos Rgnl altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ¾ SM. When using San Marcos Rgnl altimeter setting, inop table does not apply to LNAV Cats A/B.						
ATIS 119.325	SAN ANTONIO APP CON 124.45 335.625		NEW BRAUNFELS TOWER* 127.05 (CTAF) 0 285.4	GND CON 120.175	CLNC DEL 134.75	CLNC DEL 134.75 (When twr closed)	UNICOM 122.7

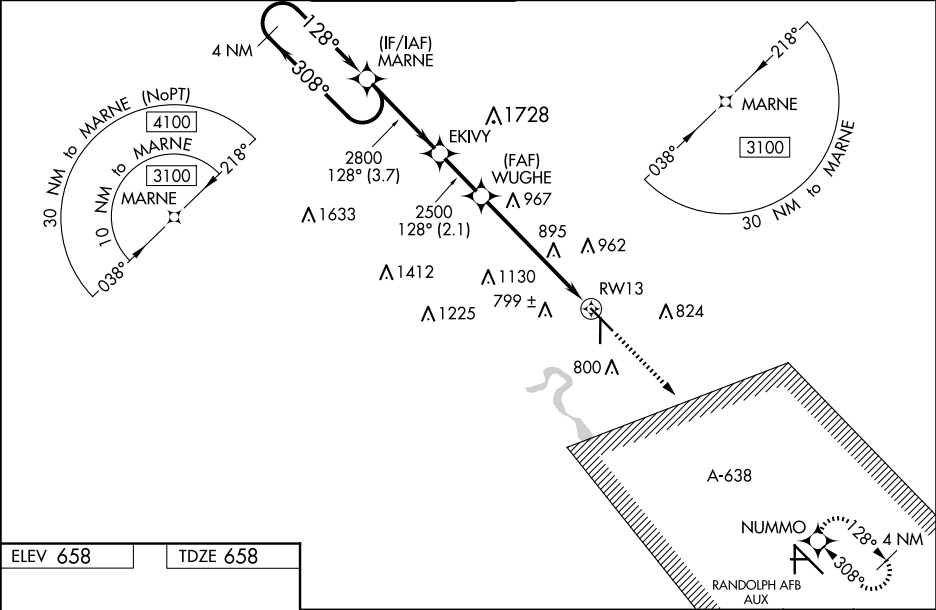

4 NM Holding Pattern		MARNE		EKIVY		WUGHE		RWY 13	
3100		308°		128°		2800		2500	
GP 3.00°		TCH 50		3.7 NM		2.1 NM		4 NM	
CATEGORY		A		B		C		D	
LPV DA				908-¾		250 (300-¾)			
LNAV/VNAV DA				1126-1¼		468 (500-1¼)			
LNAV MDA		1220-1		562 (600-1)		1220-1¾		562 (600-1¾)	
CIRCLING		1220-1		1240-1		1280-1¾		1320-2	
		562 (600-1)		582 (600-1)		622 (700-1¾)		662 (700-2)	