

|                                        |                        |                             |                                       |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>42607</b><br><b>W36A</b> | APP CRS<br><b>004°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5003</b><br><b>36</b><br><b>39</b> |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 36  
FALSE RIVER RGNL (HZR)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Baton Rouge altimeter setting. When local altimeter setting not received, use Baton Rouge altimeter setting and increase all DA 51 feet and all visibility 1/8 SM; increase all MDA 60 feet, and LNAV Cat C/D visibility 1/8 SM and Circling Cat C visibility 1/4 SM. For inop ALS when using Baton Rouge altimeter setting, increase LNAV/VNAV visibility to 1 SM and LNAV Cat C/D visibility to 1/8 SM.

ODALS

MISSED APPROACH: Climb to 2300 direct FENPU and hold.

|                            |                                            |                                 |
|----------------------------|--------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>121.250</b> | BATON ROUGE APP CON★<br><b>120.3 278.3</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|--------------------------------------------|---------------------------------|

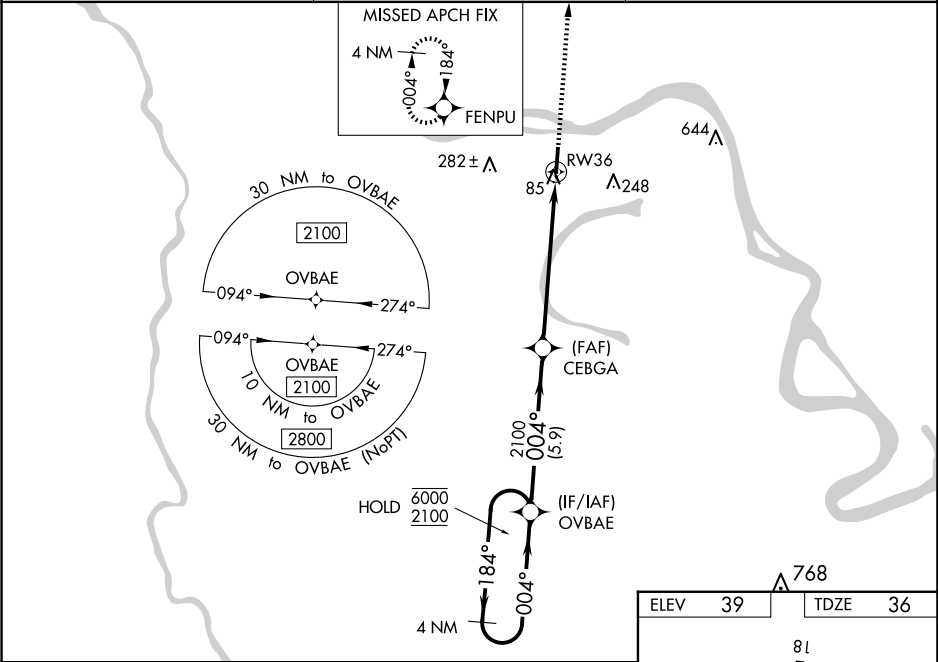

4 NM Holding Pattern

6000 ← 184°

2100 → 004°

GP 3.00°

TCH 50


OVBAE

CEBGA 2100

\*LNAV only.

\*1.4 NM to RW36

| CATEGORY     | A                        | B                    | C                            | D                    |
|--------------|--------------------------|----------------------|------------------------------|----------------------|
| LPV DA       |                          | 286-3/4              | 250 (300-3/4)                |                      |
| LNAV/VNAV DA |                          | 307-3/4              | 271 (300-3/4)                |                      |
| LNAV MDA     | 520-3/4<br>484 (500-3/4) | 520-1<br>484 (500-1) | 520-1 1/4<br>484 (500-1 1/4) | 484 (500-1 1/4)      |
| CIRCLING     | 520-1<br>481 (600-1)     |                      | 600-1 1/2<br>561 (600-1 1/2) | 600-2<br>561 (600-2) |

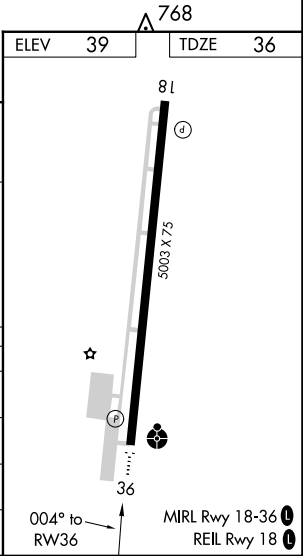

SC-4, 30 OCT 2025 to 27 NOV 2025

SC-4, 30 OCT 2025 to 27 NOV 2025