WAAS CH 62812 W17A	APP CRS 170°	Rwy ldg 4400 TDZE 769 Apt Elev 769

RNAV (GPS) RWY 17
HANNIBAL RGNL (HAE)

T NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Quincy altimeter setting; increase all DA 41 feet, all MDA 60 feet, increase LNAV Cat C visibility ¼ SM and Circling Cat C visibility ¼ SM.
Baro-VNAV and VDP NA when using Quincy altimeter setting.

MISSED APPROACH: Climb to 3000 direct PARCK and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
120.775	126.225 317.775	122.8 (CTAF) L

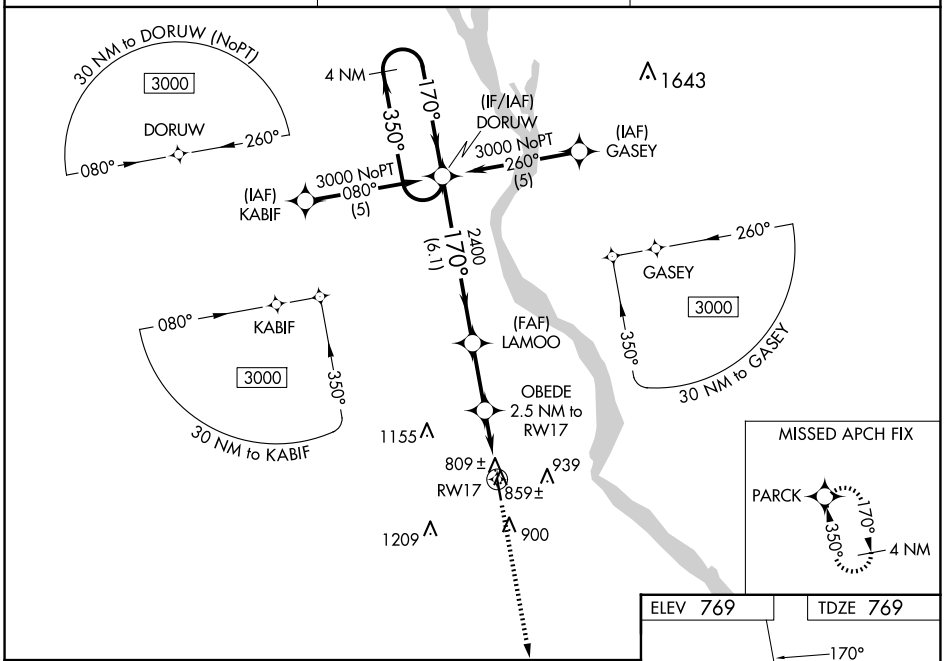

CATEGORY	A	B	C	D
LPV DA	1019-1 250 (300-1)			NA
LNAV/VNAV DA	1079-1¼ 310 (400-1¼)			NA
LNAV MDA	1120-1 351 (400-1)			NA
CIRCLING	1260-1 491 (500-1)		1640-2½ 871 (900-2½)	NA

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

NC-3, 30 OCT 2025 to 27 NOV 2025

NC-3, 30 OCT 2025 to 27 NOV 2025