

WAAS CH 78428 W08A	APP CRS 080°	Rwy Idg 4601 TDZE 831 Apt Elev 836
--	------------------------	---


RNAV (GPS) RWY 8

BLACK RIVER FALLS AREA (BCK)

V Baro-VNAV NA when using La Crosse altimeter setting. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -16°C (4°F) or above 38° C (100°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA with La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting: increase LPV DA to 1172 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1441 feet and visibility all Cats ½ SM; increase all MDA 100 feet and visibility LNAV Cat B ¼ SM, Cat C and D ½ SM and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3500 direct
ZELED and hold.

AWOS-3PT	MINNEAPOLIS CENTER	CTAF
119.125	128.6 363.0	122.9 0

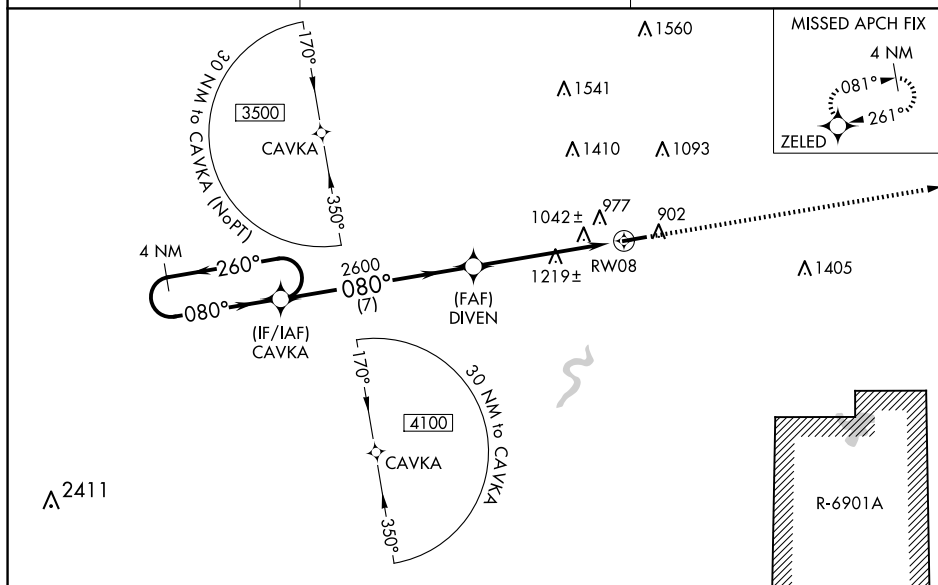

EC-3, 30 OCT 2025 to 27 NOV 2025

CATEGORY	A	B	C	D
LPV DA		1081- $\frac{7}{8}$	250 (300- $\frac{7}{8}$)	
LNAV/VNAV DA		1350-1 $\frac{3}{4}$	519 (600-1 $\frac{3}{4}$)	
LNAV MDA	1480-1	649 (700-1)	1480-1 $\frac{7}{8}$	649 (700-1 $\frac{7}{8}$)
CIRCLING	1480-1	644 (700-1)	1520-2 684 (700-2)	1760-3 924 (1000-3)

ELEV 836 TDZE 831

*LNAV only.

REIL Rwy 8 and 26
MIRL Rwy 8-26

BLACK RIVER FALLS AREA (BCK)
RNAV (GPS) RWY 8