CAMP MACKALL, NORTH CAROLINA

RNAV (GPS) RWY 30

WAAS CH **51219** **W30A**	APCH CRS **298°**	Rwy ldg **4794** TDZE **352** Arpt Elev **376**

AL-6315 (USA)

MACKALL AAF (KHFF)

RNP APCH-GPS

RADAR required when special use space active.

* When tower closed, increase vis to 1 mile.

MISSED APPROACH: Climb to 2400 direct AAMMO and hold.

D-ATIS	FAYETTEVILLE APP CON/DEP CON	TOWER*	GND CON
141.4	**127.8 343.725**	**121.0** (CTAF) **254.4**	**128.35 251.05**

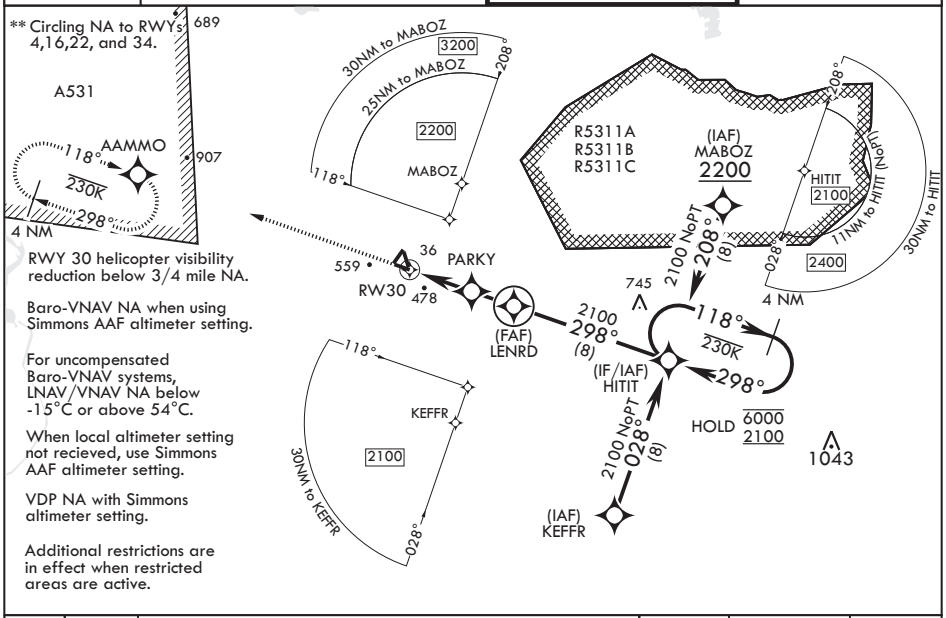

RWY 30 helicopter visibility reduction below 3/4 mile NA.

Baro-VNAV NA when using Simmons AAF altimeter setting.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

When local altimeter setting not recieved, use Simmons AAF altimeter setting.

VDP NA with Simmons altimeter setting.

Additional restrictions are in effect when restricted areas are active.

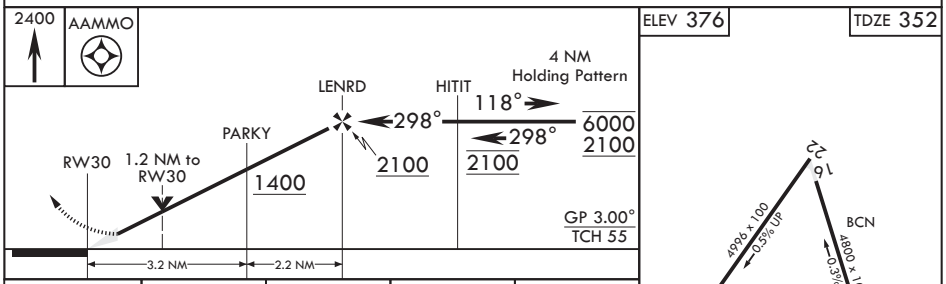

CATEGORY	A	B	C	D
LPV DA*	602-¾ 250 (300-¾)			
LNAV/VNAV DA	793-1⅜ 441 (500-1⅜)			
LNAV MDA	760-1 408 (400-1)		760-1⅛ 408 (400-1⅛)	
C CIRCLING**	860-1 484 (500-1)	880-1 504 (600-1)	980-1¾ 604 (700-1¾)	1040-2 664 (700-2)
SIMMONS AAF ALTIMETER SETTING MINIMUMS				
LPV DA	686-1 334 (400-1)			
LNAV/VNAV DA	860-1⅜ 508 (500-1⅜)			
LNAV MDA	860-1 508 (500-1)		860-1⅜ 508 (500-1⅜)	
C CIRCLING**	960-1 584 (600-1)	980-1 604 (700-1)	1080-2 704 (800-2)	1140-2½ 764 (800-2½)

MIRL Rwy 12-30

SE-2, 30 OCT 2025 to 27 NOV 2025