
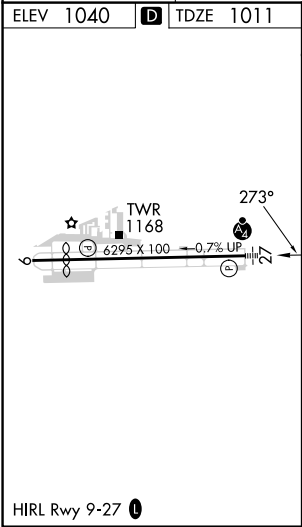


WAAS CH 97308 W27A	APP CRS 273°	Rwy Idg TDZE 1011 Apt Elev 1040
--	------------------------	---

RNAV (GPS) RWY 27

COBB COUNTY INTL/MCCOLLUM FLD (RYY)

RNP APCH-GPS.						MALSF 	MISSED APPROACH: Climb to 3500 direct UPHAH and hold.
Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C and D visibility to 1½ SM.							
ATIS 128.125	ATLANTA APP CON 121.0 268.7	MCCOLLUM TOWER ★ 125.9 (CTAF) 0	GND CON 119.0	CLNC DEL 119.0	CLNC DEL 121.0 268.7 (When twr closed)	UNICOM 122.7	

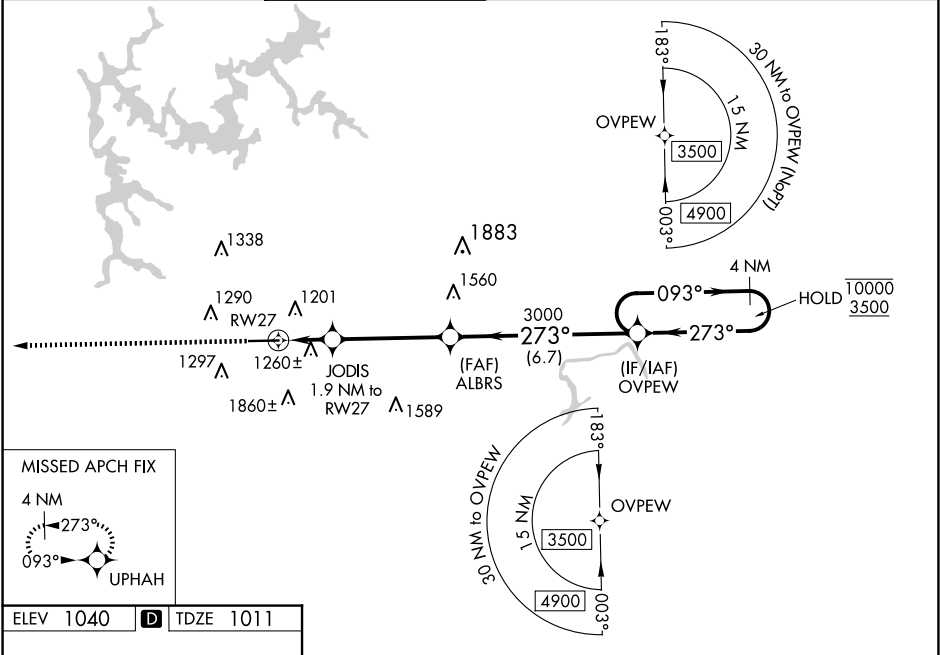

3500		UPHAH	
RW27		ALBRS	
JODIS 1.9 NM to RW27		3000	
1660		3000	
1.9 NM		4.2 NM	
6.7 NM		4 NM Holding Pattern	
OVPEW		093° → 10000	
← 273°		← 273°	
GP 3.00°		TCH 46	
CATEGORY	A	B	C
LPV DA	1211-¾	200 (200-¾)	
LNAV/VNAV DA	1520-1¼	509 (500-1¼)	
LNAV MDA	1520-¾	509 (500-¾)	1520-1¼ 509 (500-1¼)
CIRCLING	1800-1	760 (800-1)	2180-3 1140 (1200-3)