


|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>65813</b><br><b>W16A</b> | APP CRS<br><b>155°</b> | Rwy Ldg<br>TDZE <b>3174</b><br>Apt Elev <b>3174</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 16  
ANDREWS COUNTY (E11)

|                                                                                                                                                                                                                                                                                                                                                              |                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| RNP APCH-GPS.<br>⚠ Circling NA west of Rwy 16/34. Rwy 16 helicopter visibility reduction below ¾ SM NA.<br>⚠ When local altimeter setting not received, use Midland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Circling Rwy 2, 11, 20, 29, 34 NA at night. VDP NA when using Midland altimeter setting. | MISSED APPROACH: Climb to 5000 direct ANOXY and via track 150° to PIZON and hold. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|

|                          |                                         |                                 |
|--------------------------|-----------------------------------------|---------------------------------|
| AWOS - 3<br><b>118.2</b> | MIDLAND APP CON ★<br><b>124.6 290.4</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-----------------------------------------|---------------------------------|

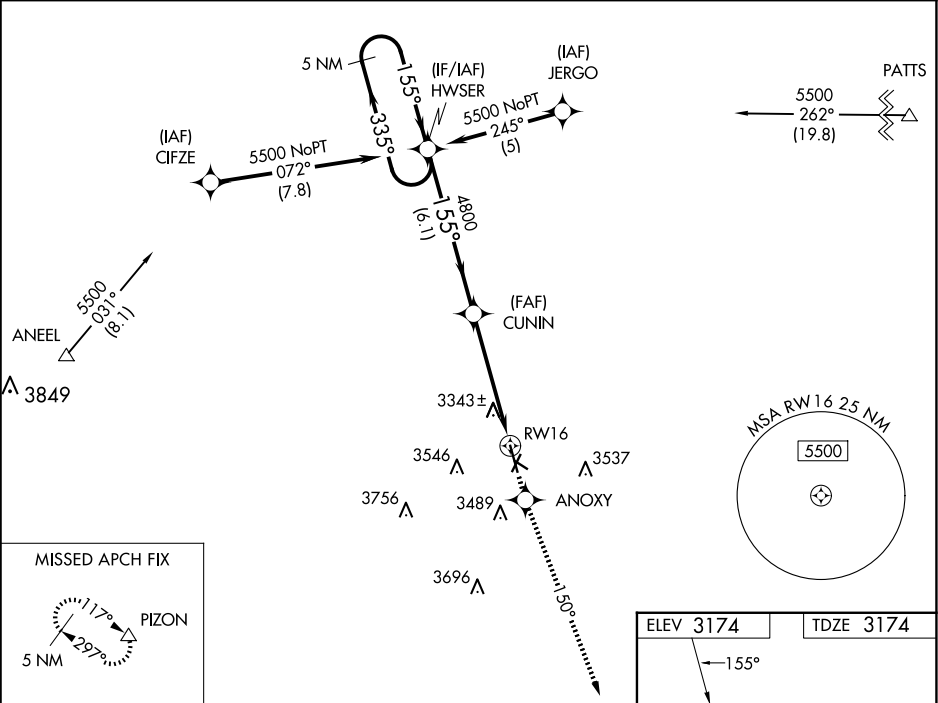

|                                                                  |         |              |                         |         |       |
|------------------------------------------------------------------|---------|--------------|-------------------------|---------|-------|
| VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37). |         | 5000         | ANOXY                   | tr 150° | PIZON |
| 5 NM Holding Pattern                                             |         | 5500         | 335°                    | 155°    |       |
| GP 3.00° TCH 45                                                  |         | 4800         |                         |         |       |
| 6.1 NM                                                           |         | 3.2 NM       | 1.7 NM                  |         |       |
| CATEGORY                                                         | A       | B            | C                       | D       |       |
| LPV DA                                                           | 3533-1¼ | 359 (400-1¼) |                         | NA      |       |
| LNAV/VNAV DA                                                     | 3802-2¼ | 628 (700-2¼) |                         | NA      |       |
| LNAV MDA                                                         | 3780-1  | 606 (700-1)  | 3780-1¾<br>606 (700-1¾) | NA      |       |
| CIRCLING                                                         | 3780-1  | 606 (700-1)  | 4000-2½<br>826 (900-2½) | NA      |       |

