

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>56429</b><br><b>W14A</b> | APP CRS<br><b>135°</b> | Rwy Idg<br>TDZE <b>678</b><br>Apt Elev <b>678</b> | <b>5006</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|


RNAV (GPS) RWY 14

CHEROKEE COUNTY (J50)

Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase all DA to 1046 feet and increase LPV visibility ½ SM and LNAV/VNAV visibility ¼ SM; increase all MDA 120 feet and LNAV visibility Cat C ¾ SM, Circling visibility Cat C ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Nacogdoches altimeter setting.

MISSED APPROACH: Climb to 3100 direct NOPCI and hold.

|                          |                                           |                                 |
|--------------------------|-------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.075</b> | LONGVIEW APP CON*<br><b>128.75 379.15</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|-------------------------------------------|---------------------------------|

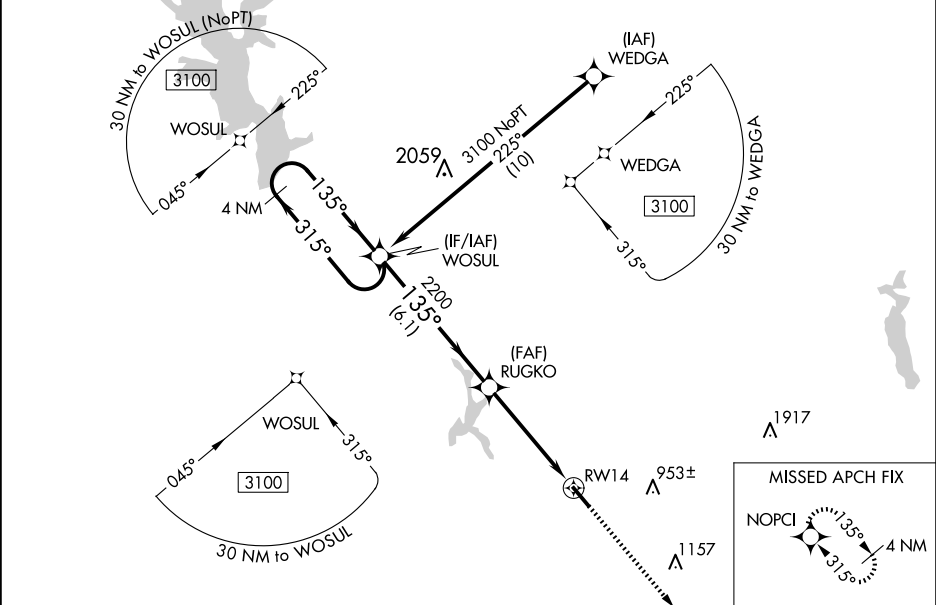

|                            |                       |                       |                           |                 |  |
|----------------------------|-----------------------|-----------------------|---------------------------|-----------------|--|
| 4 NM Holding Pattern WOSUL |                       | RUGKO 2200            |                           | RW14            |  |
| 3100 ← 315°                |                       | → 135°                |                           | → 135°          |  |
| GP 3.00° TCH 30            |                       | 2200                  |                           | *1.2 NM to RW14 |  |
| 6.1 NM                     |                       | 3.5 NM                |                           | 1.2             |  |
| CATEGORY                   | A                     | B                     | C                         | D               |  |
| LPV DA                     | 928-1                 | 250 (300-1)           |                           | NA              |  |
| LNAV/VNAV DA               | 928-1                 | 250 (300-1)           |                           | NA              |  |
| LNAV MDA                   | 1080-1                | 402 (500-1)           | 1080-1 ½<br>402 (500-1 ½) | NA              |  |
| CIRCLING                   | 1080-1<br>402 (500-1) | 1140-1<br>462 (500-1) | 1280-1 ¾<br>602 (700-1 ¾) | NA              |  |