

WAAS
CH **63018**
W20A

APP CRS
204°

Rwy Idg
TDZE **1259**
Apt Elev **1265**

RNAV (GPS) RWY 20

WILBARGER COUNTY (F05)

RNP APCH.


▼

▲

Baro-VNAV NA when using Frederick altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 20 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Frederick altimeter setting: increase all DA/MDA 40 feet.

MISSED APPROACH:
Climb to 3300 direct
OXULY and hold.

AWOS-3 118.525	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

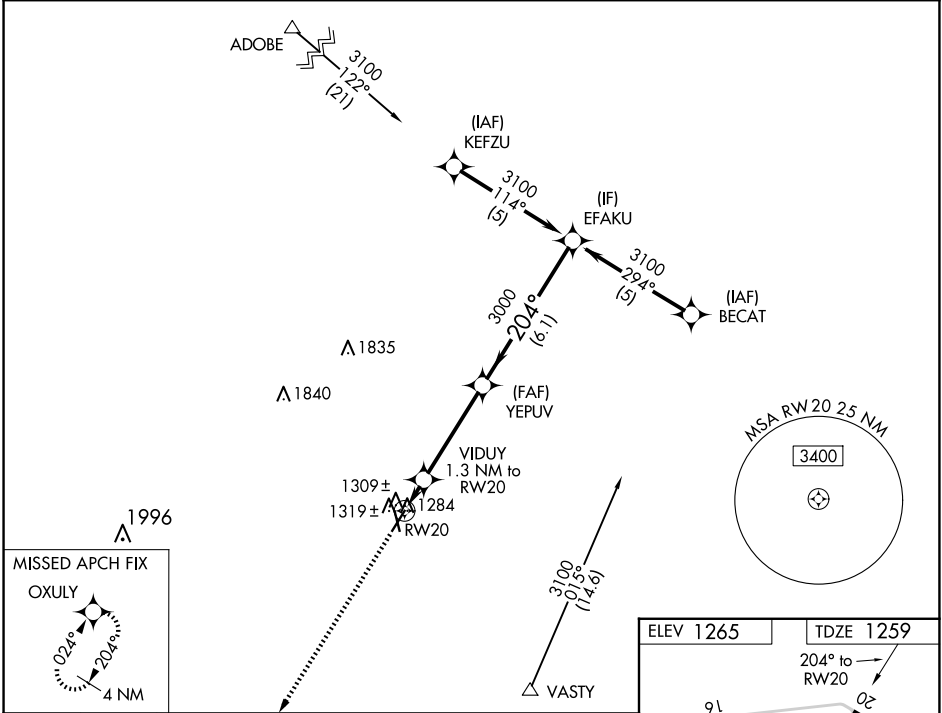

3300

OXULY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 25).

*LNAV only

VIDUY
1.3 NM to
RW20

YEPUV
3000

EFAKU
3100

3000

204°

1700*

3000

GP 3.00°
TCH 40

CATEGORY	A	B	C	D
LPV DA	1509-1	250 (300-1)		NA
LNAV/VNAV DA	1585-1¼	326 (400-1¼)		NA
LNAV MDA	1580-1	321 (400-1)		NA
CIRCLING	1660-1 395 (400-1)	1720-1 455 (500-1)	1800-1½ 535 (600-1½)	NA

