


WAAS CH 72614 W05A	APP CRS 055°	Rwy Ldg TDZE 360 Apt Elev 361
--	------------------------	---

RNAV (GPS) RWY 5

ENTERPRISE MUNI (EDN)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2500 direct CEYLU and left turn via track 295° to HAXES and left turn via track 191° to ROTOY and hold.
Baro-VNAV NA when using OZR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use OZR altimeter setting. Circling Rwy 23 NA at night.	

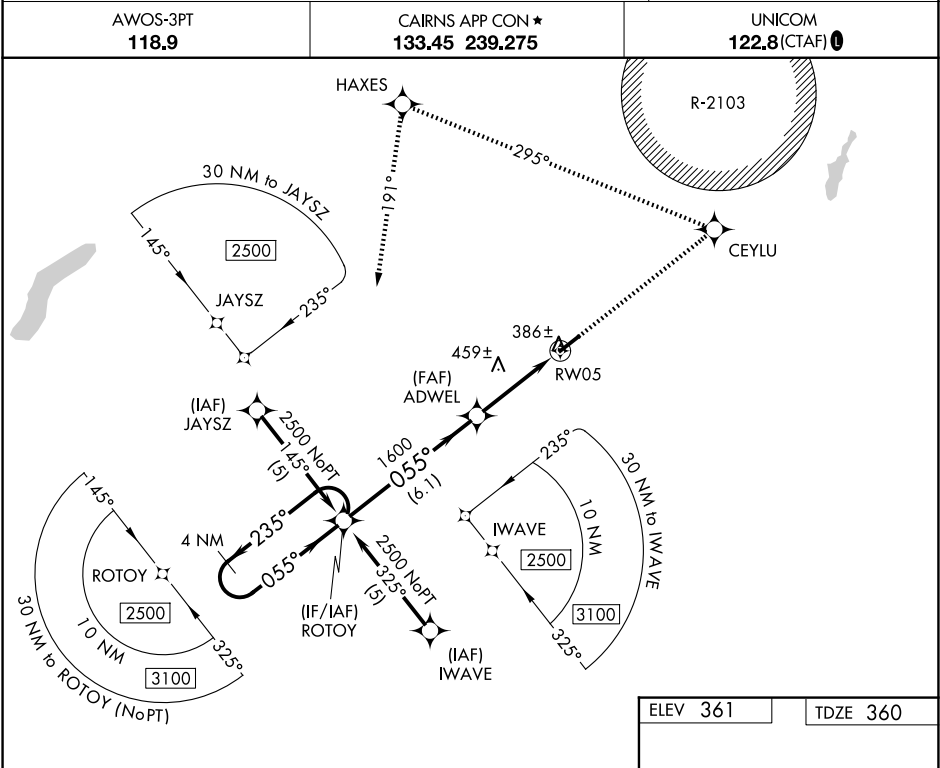

4 NM Holding Pattern ROTOY		2500 CEYLU	HAXES	ROTOY
2500 ← 235°		↑	tr 295°	tr 191°
GP 3.00° TCH 40		ADWEL 1600		
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 50).		RW05		
6.1 NM		3.8 NM		
CATEGORY	A	B	C	D
LPV DA	642-1 282 (300-1)			NA
LNAV/VNAV DA	688-1¼ 328 (400-1¼)			NA
LNAV MDA	760-1 400 (400-1)			NA
CIRCLING	920-1 559 (600-1)		1100-2 739 (800-2)	NA

ELEV 361

TDZE 360

REIL Rws 5 and 23 0

MIRL Rwy 5-23 0