

WAAS
CH **97434**
W22A

APP CRS
218°

Rwy Idg
TDZE **1378**
Apt Elev **1379**

RNAV (GPS) RWY 22

EL DORADO/CAPT JACK THOMAS MEML (EQA)


▼

⚠ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3000 direct CERVK and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

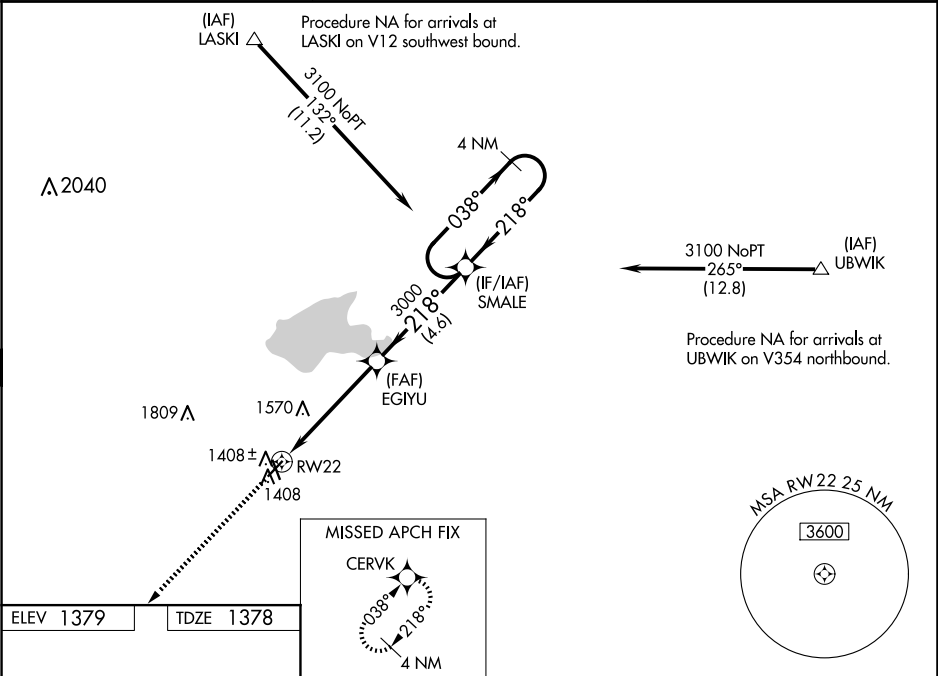

ELEV 1379 TDZE 1378		218° to RW22 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 4204 X 75 4200 X 75 33			
3000 CERVK		SMALE 4 NM Holding Pattern 038° → ← 218° 3100 GP 3.00° TCH 40			
*LNAV only *1.5 NM to RW22 RW22 1.5 3.5 NM 4.6 NM					
CATEGORY		A	B	C	D
LPV DA		1578-1	200 (200-1)	NA	
LNAV/VNAV DA		1671-1	293 (300-1)	NA	
LNAV MDA		1900-1	522 (600-1)	NA	
CIRCLING		1900-1 521 (600-1)	1960-1 581 (600-1)	NA	