
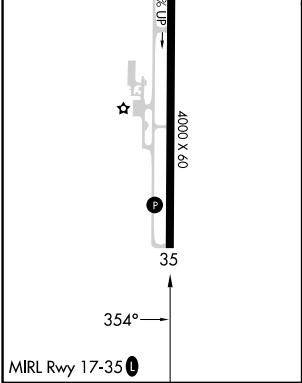



APP CRS	Rwy Idg	4000
354°	TDZE	984
	Apf Elev	985

RNAV (GPS) RWY 35
CHANDLER RGNL (CQB)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct CADUT and hold.
▼ ▲ NA	When local altimeter setting not received, use Shawnee altimeter setting and increase all MDA 80 feet; increase LNAV Cat C visibility ½ SM. VDP NA with Shawnee Rgnl altimeter setting.

AWOS-3PT 119.275	KANSAS CITY CENTER 127.8 319.1	CTAF 122.9 0
---------------------	-----------------------------------	-----------------

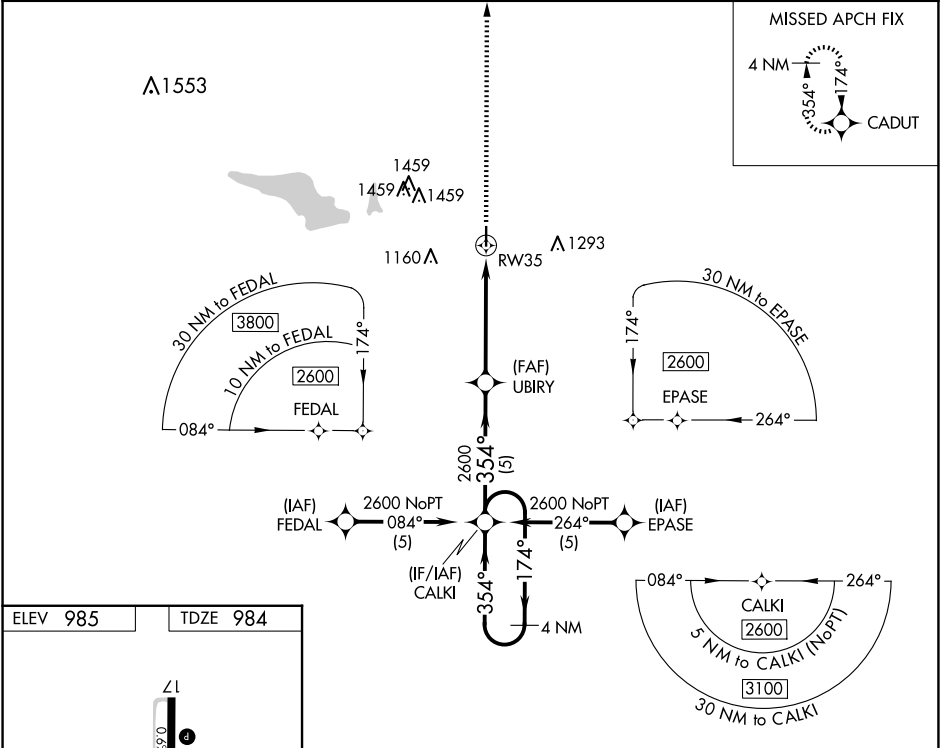

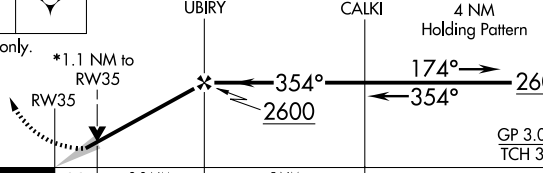2600	CADUT	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 42).			
					
*LNAV only.					
*1.1 NM to RW35					
RW35					
UBIRY					
CALKI					
4 NM Holding Pattern					
2600					
GP 3.00° TCH 30					
CATEGORY		A	B	C	D
GLS PA DA		NA			
LNAV/VNAV DA		NA			
LNAV MDA		1320-1 335 (400-1)			NA