

WAAS CH 63135 W32A	APP CRS 323°	Rwy Idg 4400 TDZE 1800 Apt Elev 1800
--	------------------------	---

RNAV (GPS) RWY 32
SMITH CENTER MUNI (K82)

RNP APCH - GPS.

A Baro-VNAV and VDP NA when using CNK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2174 feet; increase LNAV/VNAV DA to 2224 feet and all visibilities ½ SM; increase all MDAs 180 feet, and Circling all visibilities ½ SM.




MISSED APPROACH: Climb to 3900 direct LAYIP and hold.

AWOS-3PT
118.45

MINNEAPOLIS CENTER
119.4 278.8



UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX

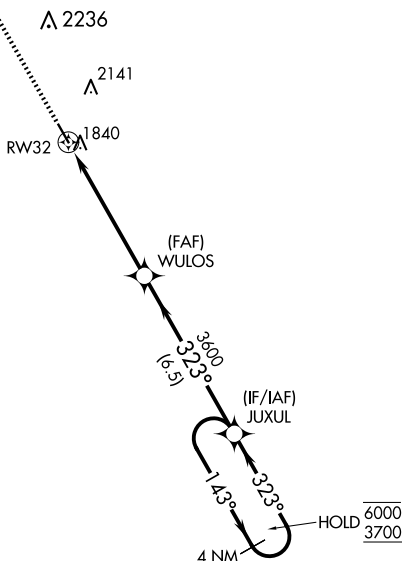

ELEV 1800		TDZE 1800
-----------	--	-----------

MIRL Rwy 14-32 **L**
REIL Rwy 14 and 32 **L**

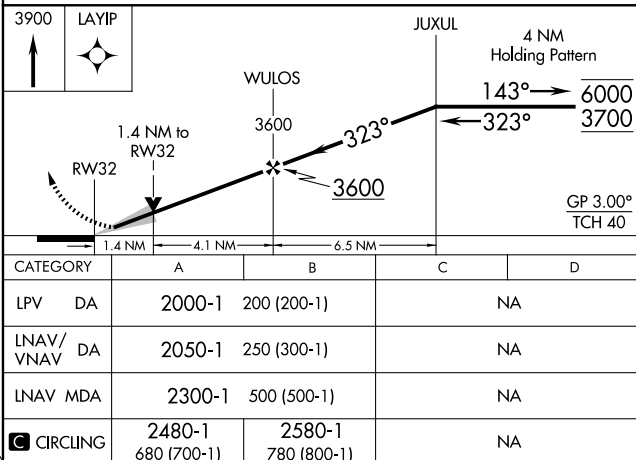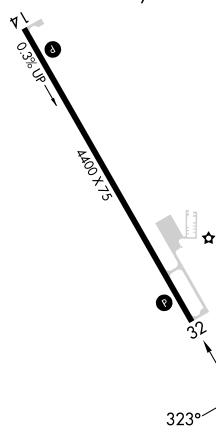

CATEGORY		A	B	C	D
LPV	DA	2000-1	200 (200-1)	NA	
RNAV/ VNAV	DA	2050-1	250 (300-1)	NA	
RNAV	MDA	2300-1	500 (500-1)	NA	
 CIRCLING		2480-1 680 (700-1)	2580-1 780 (800-1)	NA	