

WAAS
CH **57927**
W12A

APP CRS
118°

Rwy Ldg
TDZE **2609**
Apt Elev **2615**


RNAV (GPS) RWY 12
ROY HURD MEML (E01)

RNP APCH GPS.

▼ When local altimeter setting not received, use INK altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ¾ SM, and LP visibility Cat C ½ SM, and
▲ Circling visibility Cat C ½ SM. Rwy 12 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 12 NA at night, Circling Rwy 1, 12, 19 NA at night.

MISSED APPROACH: Climb to 3200 then climbing left turn to 6000 direct INK VORTAC and hold.

AWOS-3PT 118.225	FORT WORTH CENTER 133.1 298.95	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

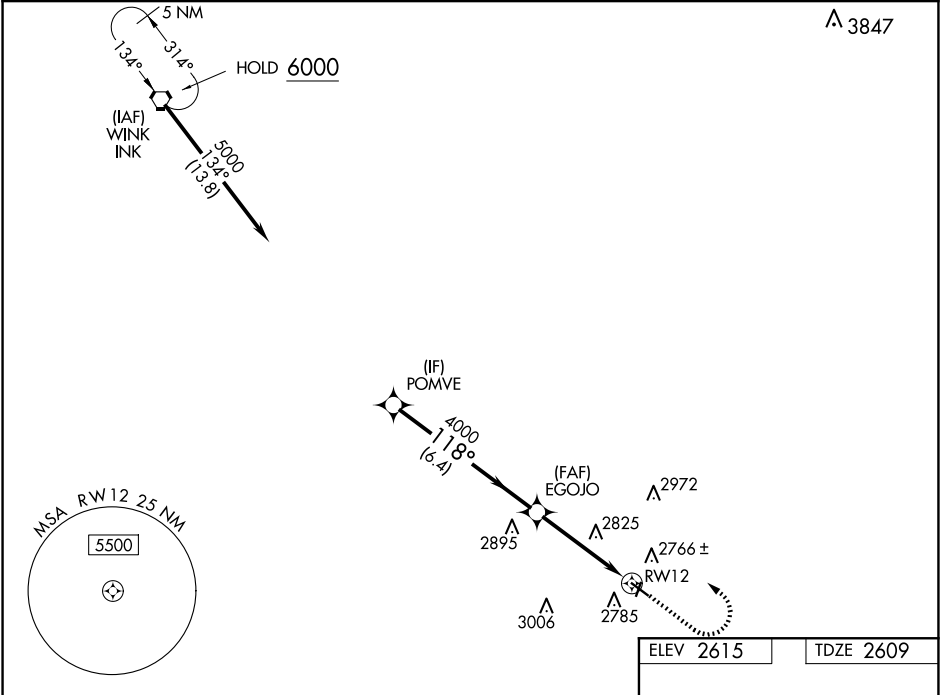

VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 24).

3200

6000

INK

POMVE

5000

118°

EGOJO

4000

3.00°

TCH 45

RW12

6.4 NM

4.2 NM

CATEGORY	A	B	C	D
LP MDA	3100-1	491 (500-1)	3100-1 ³ / ₈ 491 (500-1 ³ / ₈)	NA
LNAV MDA	3120-1	511 (600-1)	3120-1 ³ / ₈ 511 (600-1 ³ / ₈)	NA
CIRCLING	3280-1	665 (700-1)	3280-1 ³ / ₄ 665 (700-1 ³ / ₄)	NA

ELEV 2615

TDZE 2609

118°

61

4268 X 75

2972 X 75

30