

APP CRS
051°

Rwy Idg
2500

TDZE
1209

Apt Elev
1209

RNAV (GPS) RWY 4

SEAMANS FLD (9N3)

▼


▲ NA

DME/DME RNP-0.3 NA.
Obtain local altimeter setting on CTAF; when not received,
use Wilkes-Barre/Scranton Intl altimeter setting.
VDP NA when using Wilkes-Barre/Scranton Intl altimeter setting.

MISSED APPROACH: Climbing left
turn to 4000 direct LOPEZ and hold.

WILKES-BARRE APP CON
120.95 256.7

UNICOM
122.7 (CTAF) 0

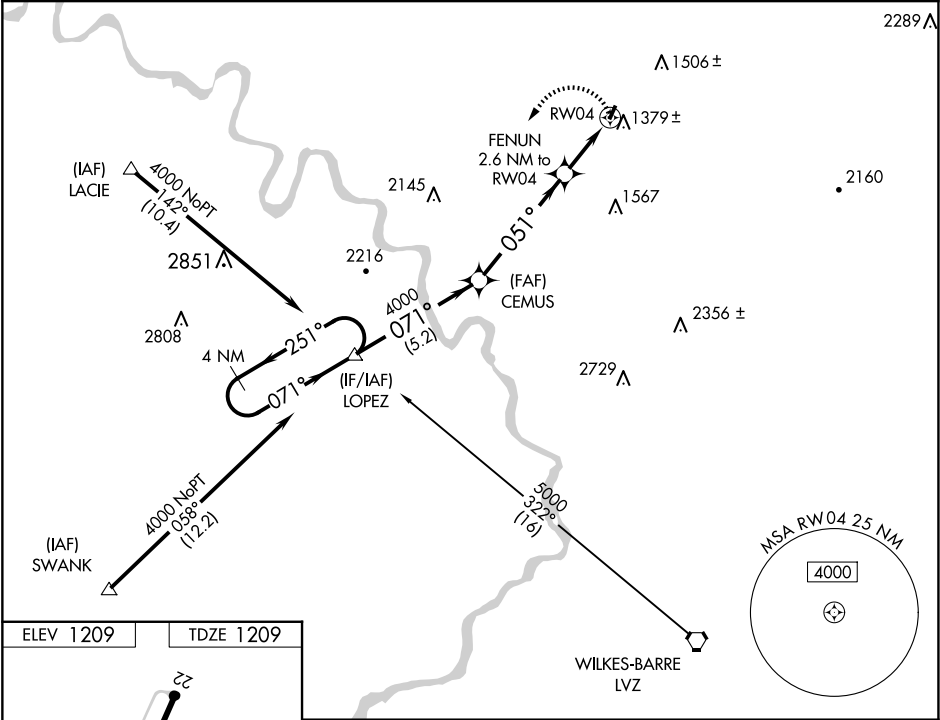

ELEV 1209

TDZE 1209

LRL Rwy 4-22 0

4 NM Holding Pattern			
LOPEZ CEMUS			
4000 251° 071° 4000 051° FENUN 2.6 NM to RW04 1.1 NM to RW04 RW04			
3.49° TCH 40 2180			
5.2 NM 4.9 NM 1.5 NM 1.1			
CATEGORY	A	B	C D
LNAV MDA	1 640-1	431 (500-1)	NA
CIRCLING	1720-1 511 (600-1)	1780-1 571 (600-1)	NA
WILKES-BARRE/SCRANTON INTL ALTIMETER SETTING MINIMUMS			
LNAV MDA	1720-1	511 (600-1)	NA
CIRCLING	1800-1 591 (600-1)	1860-1 651 (700-1)	NA

NE-4, 30 OCT 2025 to 27 NOV 2025

NE-4, 30 OCT 2025 to 27 NOV 2025