


WAAS CH 49113 W35A	APP CRS 349°	Rwy ldg 5498 TDZE 1670 Apt Elev 1670
--	------------------------	---


RNAV (GPS) RWY 35
YORK MUNI (JYR)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV, all LNAV/VNAV, and Cat C LNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.	MISSED APPROACH: Climb to 4000 direct EHJAM and hold.
--	---

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------------

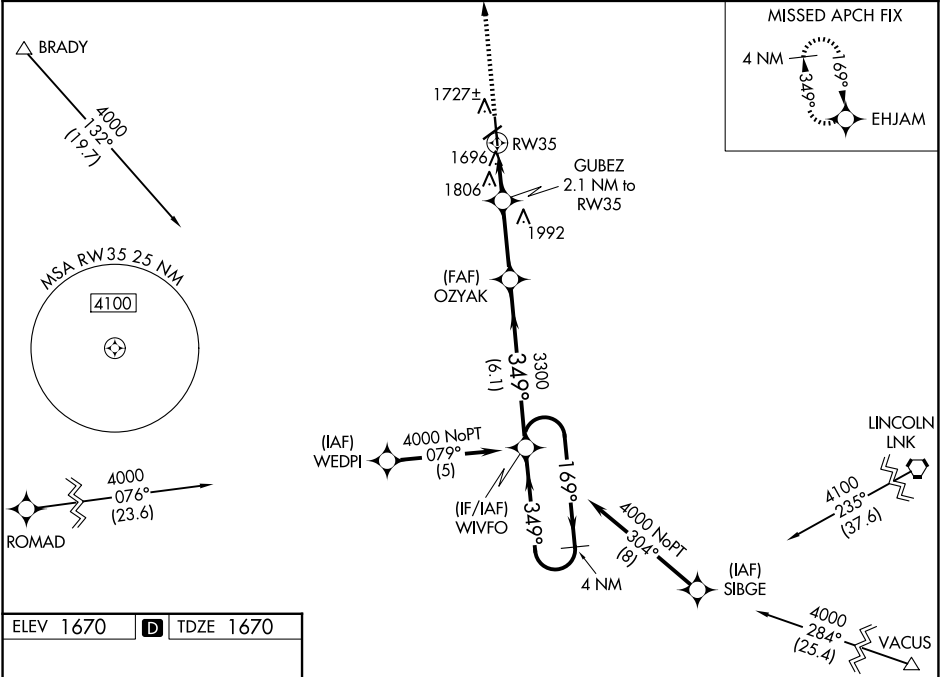

ELEV 1670	D	TDZE 1670
-----------	---	-----------

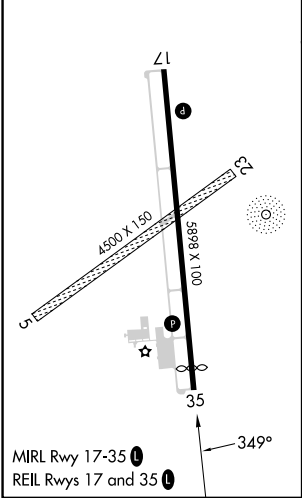

4000 ↑ EHJAM		VGSI and RNAV glidepath not coincident (VGSI 3.00/TCH 40).		WIVFO 4 NM Holding Pattern	
*LNAV only.		GUBEZ 2.1 NM to RW35	OZYAK	169°→ ←349° 4000	
1.2 NM to RW35		2380		GP 3.00° TCH 45	
RW35		3300			
1.2 NM		0.9	2.8 NM	6.1 NM	
CATEGORY		A	B	C	D
LPV	DA	1920-¾ 250 (300-¾)			NA
LNAV/ VNAV	DA	2004-1¼ 334 (400-1¼)			NA
LNAV	MDA	2060-1 390 (400-1)			NA
CIRCLING		2060-1 390 (400-1)	2180-1 510 (600-1)	2200-1½ 530 (600-1½)	NA