

WAAS CH 77905 W23A	APP CRS 234°	Rwy Ldg TDZE Apt Elev 7300 7143 7143
--	------------------------	--

RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FLD (E V W)

RNP APCH - GPS.


▼

For inoperative MALSR, increase LPV all Cats visibility to 1, LNAV/VNAV Cat D to 1 and LNAV Cat D to 1¼. When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C or above 34°C.

MALSR

MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF)
----------------------	--	----------------------	-------------------------------

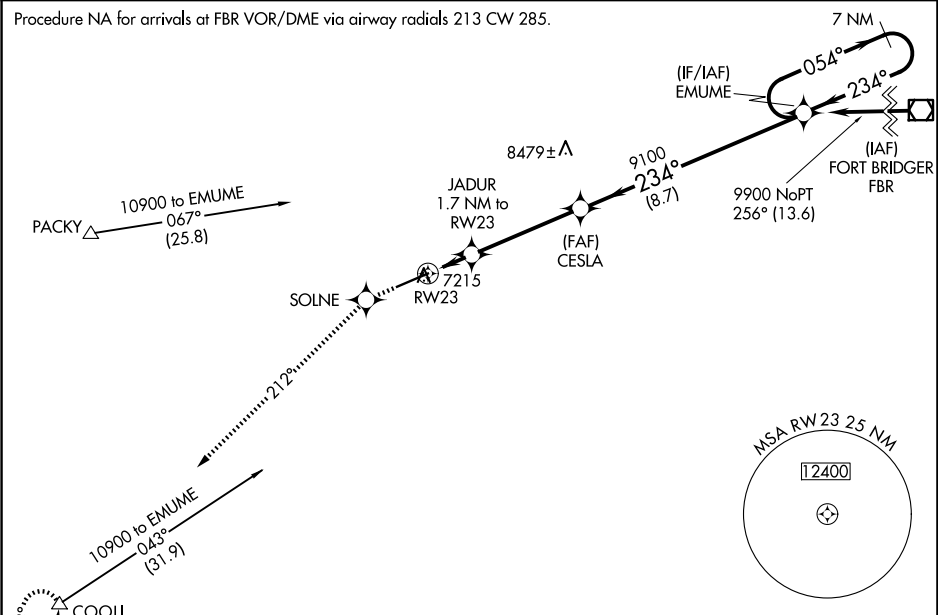

ELEV 7143

TDZE 7143

12000

212° tr

*LNAV only

JADUR 1.7 NM to RW23

EMUME

7 NM Holding Pattern

9900

GP 3.00°

TCH 47

CATEGORY	A	B	C	D
LPV DA	7393-1/2 250 (300-1/2)			
LNAV/VNAV DA	7443-1/2 300 (300-1/2)		7443-3/4 300 (300-3/4)	
LNAV MDA	7520-1/2 377 (400-1/2)		7520-1 377 (400-1)	
CIRCLING	7680-1 537 (600-1)	7760-1 617 (700-1)	7800-1 3/4 657 (700-1 3/4)	8000-2 3/4 857 (900-2 3/4)

REIL Rwy 5

HIRL Rwy 5-23