

|                                                      |                        |                                                                 |
|------------------------------------------------------|------------------------|-----------------------------------------------------------------|
| LOC/DME I-UKF<br><b>111.55</b><br>Chan <b>52</b> (Y) | APP CRS<br><b>007°</b> | Rwy Idg <b>6201</b><br>TDZE <b>1276</b><br>Apt Elev <b>1303</b> |
|------------------------------------------------------|------------------------|-----------------------------------------------------------------|

ILS Z or LOC Z RWY 1  
WILKES COUNTY (UKF)

DME required. RNAV 1-GPS required.

**T** VDP NA when using Hickory altimeter setting. When local altimeter setting not received, use Hickory altimeter setting and increase S-ILS DA to 1569 feet and all MDAs 100 feet, and increase S-LOC Cats C/D visibility  $\frac{3}{8}$  SM and Circling Cat C visibility  $\frac{1}{2}$  SM. For inop ALS when using Hickory altimeter setting, increase S-ILS all Cats visibility and S-LOC Cat C/D visibility  $\frac{3}{8}$  SM.

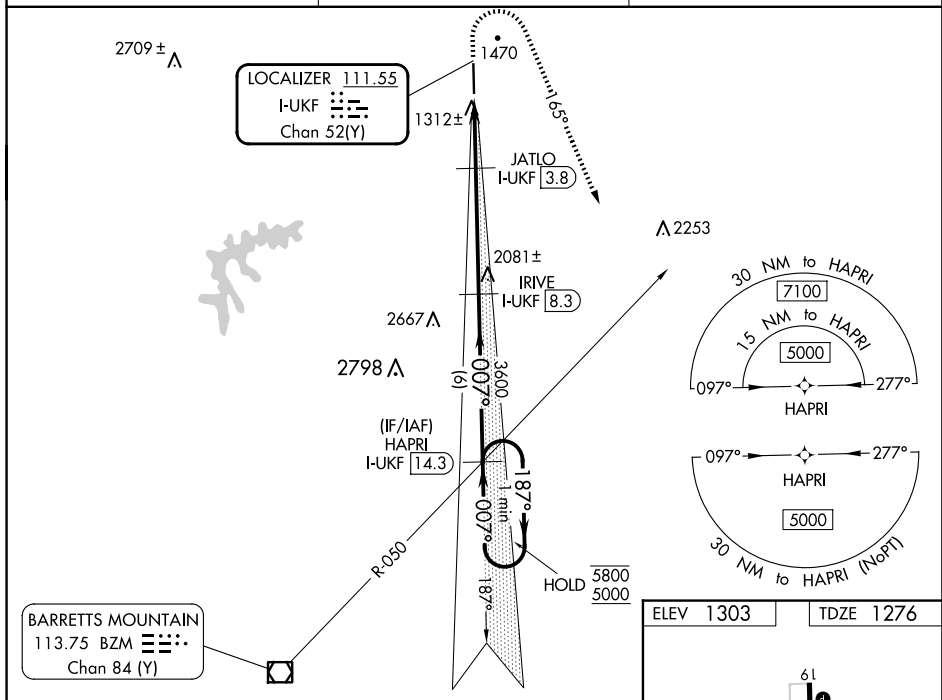
MALSR



**MISSED APPROACH:** Climb to 1740 then climbing right turn to 5000 heading 165° and BZM VOR/DME R-050 direct HAPRI/I-UKF 14.3 DME and hold, continue climb-in-hold to 5000.

AWOS-3  
126.625

ATLANTA CENTER  
125.15 263.0

UNICOM  
122.7 (CTAF) 

One Minute Holding Pattern

HAPRI I-UKF 14.3

IRIVE I-UKF 8.3

JATLO I-UKF 3.8

I-UKF 2.1

I-UKF 1.1

5800 ← 187°

5000 007° →

007°

3600

2160

6 NM

4.5 NM

1.7 NM

1 NM

GS 3.00° TCH 59°

\* LOC only.

| CATEGORY          | A                     | B                     | C                       | D                      |
|-------------------|-----------------------|-----------------------|-------------------------|------------------------|
| S-ILS 1           |                       | 1476-½                | 200 (200-½)             |                        |
| S-LOC 1           | 1640-½                | 364 (400-½)           | 1640-⅝                  | 364 (400-⅝)            |
| <b>C</b> CIRCLING | 1800-1<br>497 (500-1) | 1880-1<br>577 (600-1) | 1880-1½<br>577 (600-1½) | 2240-3<br>937 (1000-3) |

|           |  |           |
|-----------|--|-----------|
| ELEV 1303 |  | TDZE 1276 |
|-----------|--|-----------|

