


TOP ALTITUDE:
FL230

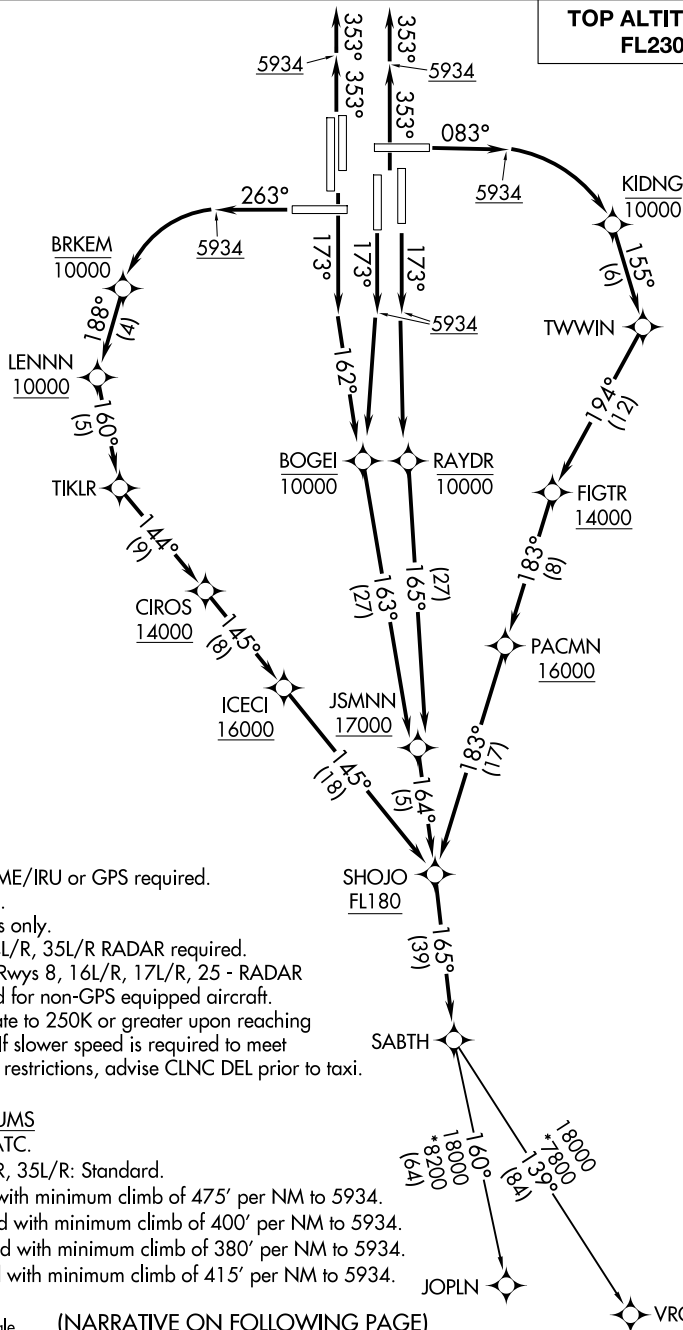

NOTE: DME/DME/IRU or GPS required. SH
NOTE: RNAV 1. FL
NOTE: Turbojets only.
NOTE: Rwy 34L/R, 35L/R RADAR required.
NOTE: Takeoff Rwy 8, 16L/R, 17L/R, 25 - RADAR
required for non-GPS equipped aircraft.
NOTE: Accelerate to 250K or greater upon reaching
10000. If slower speed is required to meet
crossing restrictions, advise CLNC DEL prior to taxi.

TAKEOFF MINIMUMS

Rwys 7, 26: NA-ATC.

Rwy 17L/R, 34L/R, 35L/R: Standard.

Rwy 8: Standard with minimum climb of 475' per NM to 5934.

Rwy 16L: Standard with minimum climb of 400' per NM to 5934.

Rwy 16R: Standard with minimum climb of 380' per NM to 5934.

Rwy 25: Standard with minimum climb of 415' per NM to 5934.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SABTH TWO DEPARTURE (RNAV)

(SABTH2.SABTH) 10SEP20

DENVER, COLORADO
DENVER INTL (DEN)