

WAAS CH 45912 W18A	APP CRS 180°	Rwy Ldg TDZE Apt Elev 5905 734 734
--	------------------------	--

RNAV (GPS) RWY 18

MOUNT STERLING MUNI (I63)


RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using UIN altimeter setting. When local altimeter setting not received, use UIN altimeter setting and increase LPV DA to 1087 feet; increase LNAV/VNAV DA to 1146 feet and all visibilities ½ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2700 direct BEWOH and hold.

AWOS-3PT 118.325	KANSAS CITY CENTER 126.225 317.775	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

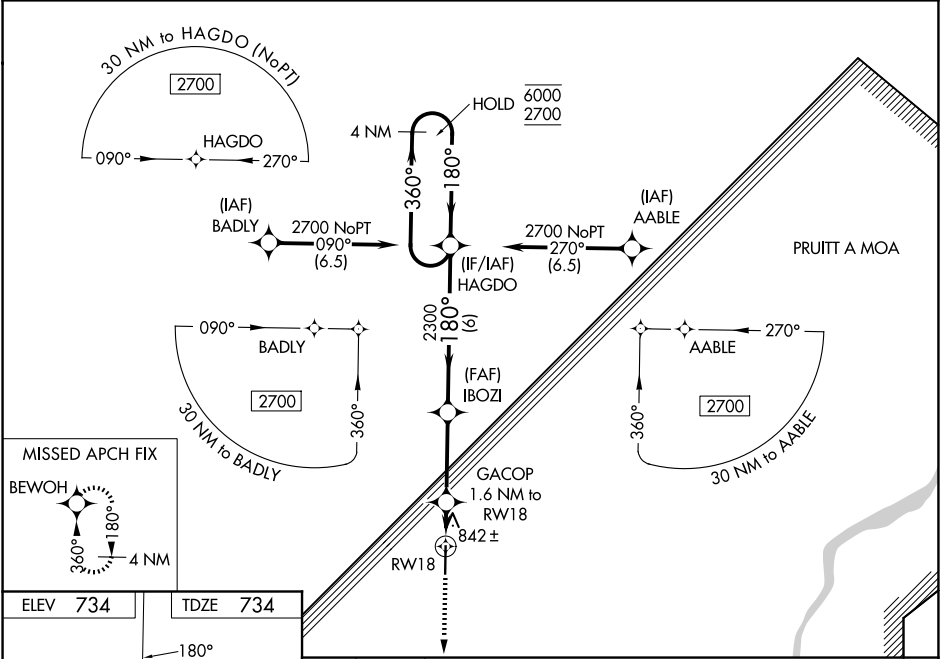

ELEV 734	TDZE 734	2700 BEWOH	IBOZI 2300	HAGDO 4 NM Holding Pattern	GP 3.00° TCH 43
81	180°	GACOP 1.6 NM to RW18	1 NM to RW18	360° → 6000	180° ← 2700
5905 x 7.5	0.3% UP	1260	2300	1 NM	0.6
36		1 NM	3.2 NM	6 NM	
MIRL Rwy 18-36 0					
CATEGORY					
LPV DA		1041-1 307 (400-1)			
LNAV/VNAV DA		1100-1 366 (400-1)			
LNAV MDA		1100-1 366 (400-1)			
CIRCLING		1160-1 426 (500-1)	1200-1 466 (500-1)	1360-1¾ 626 (700-1¾)	1360-2 626 (700-2)