

LOC I-TVR 109.7	APP CRS 357°	Rwy Idg 5002 TDZE 86 Apt Elev 86
---------------------------	------------------------	---

ILS or LOC RWY 36

VICKSBURG TALLULAH RGNL (TVR)

RNP APCH - GPS required for procedure entry at BARNE.



ADF required.

For inop ALS when using Vicksburg Muni, MS altimeter setting, increase S-LOC Cats C and D visibility to 1 3⁄8 SM. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting: increase SHLS 36 DA to 309 feet; increase all MDAs 40 feet and visibility S-LOC 36 Cats C/D 1⁄8 SM and Circling Cats C/D 1⁄4 SM.

SSALR

MISSED APPROACH: Climb to 1200 then climbing left turn to 2100 direct TKH NDB and hold.

ASOS 118.525	MEMPHIS CENTER 132.5 259.1	UNICOM 123.0 (CTAF)
------------------------	--------------------------------------	-------------------------------

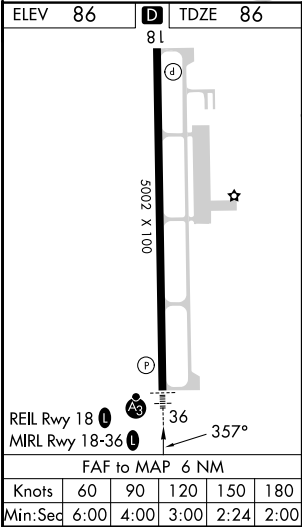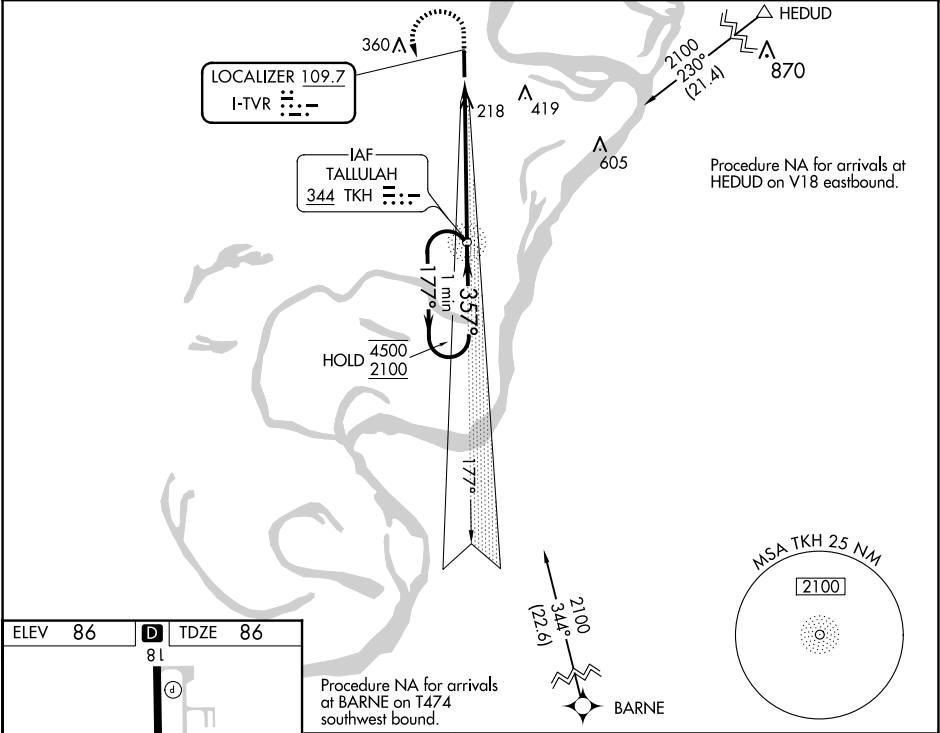

1200	2100	TKH	TKH NDB 2061	One Minute Holding Pattern
4500	2100	TKH	177°	4500
357°	357°	2100	GS 3.00°	TCH 49°
6 NM				
CATEGORY	A	B	C	D
S-ILS 36	286-1⁄2		200 (200-1⁄2)	
S-LOC 36	540-1⁄2	454 (500-1⁄2)	540-7⁄8	454 (500-7⁄8)
CIRCLING	540-1	454 (500-1)	720-1 3⁄4 634 (700-1 3⁄4)	720-2 634 (700-2)

SC-4, 30 OCT 2025 to 27 NOV 2025

SC-4, 30 OCT 2025 to 27 NOV 2025