

WAAS CH 62934 W35A	APP CRS 356°	Rwy Ldg 4200 TDZE 1320 Apt Elev 1325
--	------------------------	---

RNAV (GPS) RWY 35
SCRIBNER STATE (SCB)

RNP APCH - GPS.




NA Baro-VNAV NA. Circling Rwy 17 NA at night. Use FET altimeter setting; when not received, use AHQ altimeter setting and increase LPV DA to 1629 feet; increase LNAV/VNAV DA to 1767 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 40 feet.

MISSED APPROACH: Climb to 3300
direct AXODE and hold.

FET AWOS-3
121.275


OMAHA APP CON
135.875 354.05

CTAF
122.9

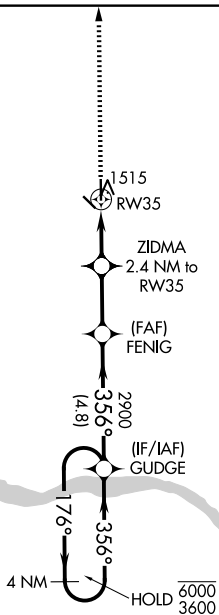


ELEV 1325

TDZE 1320

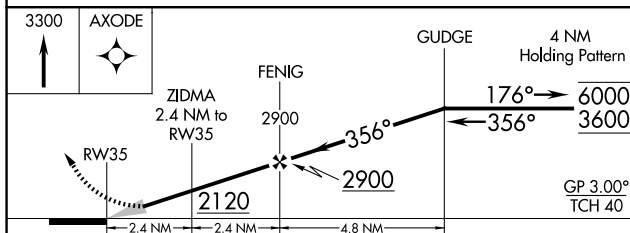

CATEGORY		A	B	C	D
LPV	DA	1606-⅞	286 (300-⅞)	NA	
INAV/ VNAV	DA	1744-1¼	424 (500-1¼)	NA	
INAV MDA		1840-1	520 (600-1)	NA	
CIRCLING		1900-1	575 (600-1)	NA	

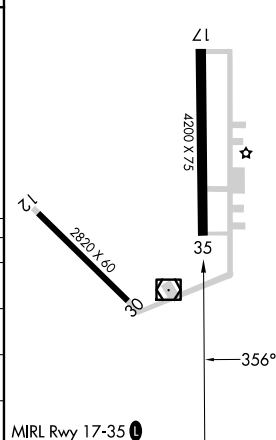

RNAV (GPS) RWY 35