

WAAS
CH **61142**
W01A

APP CRS
011°

Rwy Ldg **3992**
TDZE **89**
Apt Elev **92**

RNAV (GPS) RWY 1
NOATAK (WTK)(PAWN)

RNP APCH-GPS.


▼

▲

For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 54°C. Circling Rwy 19 NA at night.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3400 direct FITSU and hold.

AWOS-3P 135.75	ANCHORAGE CENTER 119.2 263.0	KOTZEBUE RADIO 122.4	UNICOM 122.8 (CTAF) 0
--------------------------	--	--------------------------------	---------------------------------

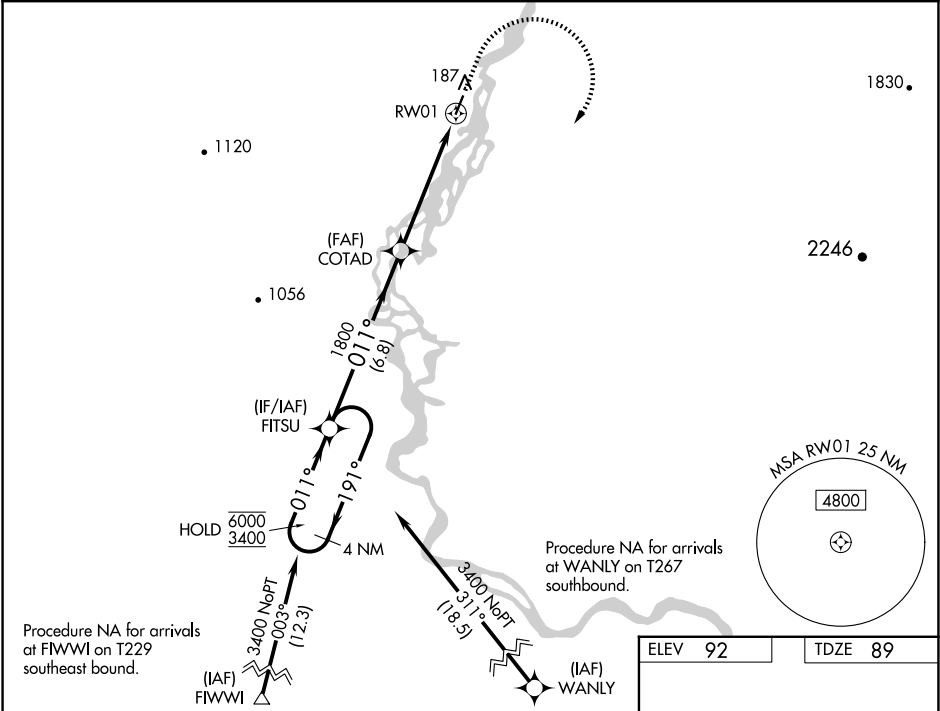

4 NM Holding Pattern

6000
3400

191°
011°

GP 3.00°
TCH 30

FITSU

COTAD

1800

1800

1.3 NM to RW01

RW01

1000

3400

FITSU

6.8 NM

4 NM

1.3 NM

CATEGORY	A	B	C	D
LPV DA	339-1 250 (300-1)			
LNAV/VNAV DA	339-1 250 (300-1)			
LNAV MDA	520-1 431 (500-1)	520-1¼ 431 (500-1¼)		
CIRCLING	520-1 428 (500-1)	560-1 468 (500-1)	560-1½ 468 (500-1½)	820-2¼ 728 (800-2¼)

