


WAAS CH 97537 W25A	APP CRS 248°	Rwy Ldg TDZE 661 Apt Elev 661
--	------------------------	---

RNAV (GPS) RWY 25

PIKE COUNTY (EOP)

RNP APCH - GPS	MISSED APPROACH: Climb to 1120 then climbing left turn to 3000 direct IGMYY and hold.
Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling Rwy 7 NA at night. When local altimeter setting not received, use PMH altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and LP visibility Cat C/D ½ SM, and Circling visibility Cat A/B/C ¼ SM. VDP NA when using PMH altimeter setting.	

AWOS-3PT 121.45	INDIANAPOLIS CENTER 135.575 290.5	UNICOM 123.0 (CTAF)
---------------------------	---	-------------------------------

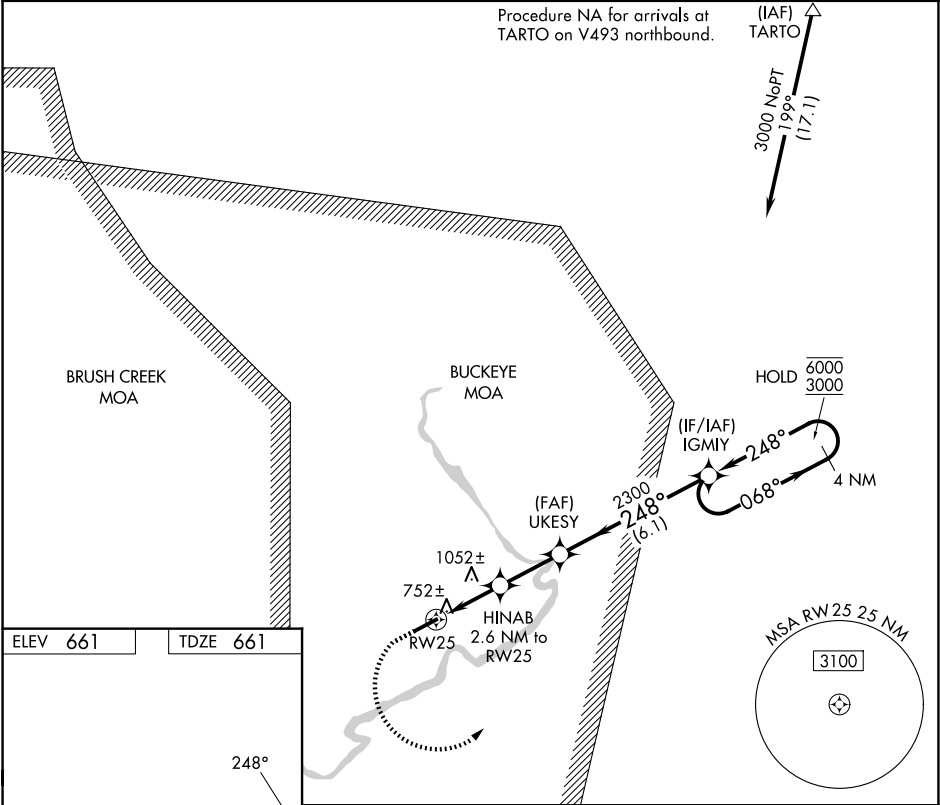

ELEV 661	TDZE 661	1120 3000 IGMYY				VGSJ and descent angles not coincident (VGSJ Angle 3.00/TCH 25).				4 NM Holding Pattern			
248°		4899 X 75		HINAB 2.6 NM to RW25		UKESY		248°		068° 6000		248° 3000	
1520		1.1 NM to RW25		1.1 NM		1.6 NM		2.4 NM		6.1 NM			
TCH 40		3.00°											
CATEGORY		A		B		C		D					
LP MDA		1280-1		619 (700-1)		1280-1¾		619 (700-1¾)					
LNAV MDA		1440-1		1460-1		1500-2½		1640-3					
CIRCLING		779 (800-1)		799 (800-1)		839 (900-2½)		979 (1000-3)					