

WAAS CH 86640 W14A	APP CRS 144°	Rwy Idg TDZE 18 Apt Elev 18	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 14


PLATINUM (PTU)(PAPM)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Togiak altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Togiak altimeter setting: increase LPV DA to 371 feet; increase LNAV/VNAV DA to 424 feet and all Cats visibilities ¾ SM; increase all MDA 120 feet and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 420 then Climbing right turn to 2500 direct FELTI and hold.

AWOS-3P 118.375	ANCHORAGE CENTER 124.2 251.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

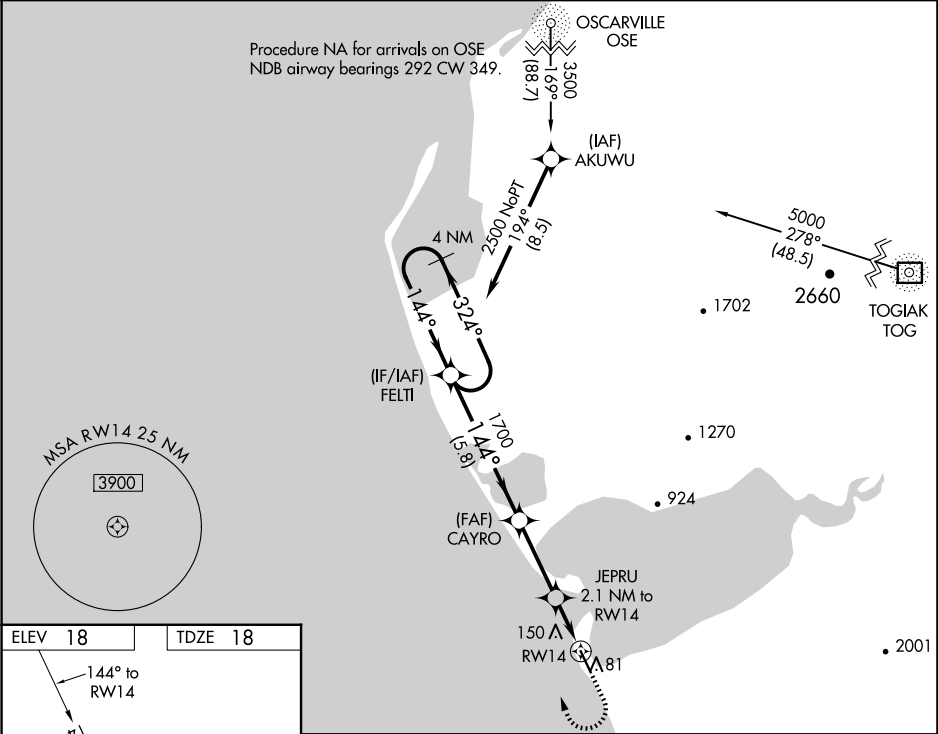

5000 x 75

32

4 NM

Holding Pattern

FELTI

CAYRO

JEPRU

2.1 NM to RW14

420

2500

FELTI

2500

← 324°

144° →

1700

144°

GP 3.00°

TCH 40

*720

*1.1 NM to RW14

RW14

*LNAV only

5.8 NM

3.1 NM

1 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	268-1 250 (300-1)			NA
LNAV/VNAV DA	321-1 303 (400-1)			NA
LNAV MDA	400-1 382 (400-1)		400-1 ¾ 382 (400-1 ¾)	NA
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1 ½ 502 (600-1 ½)	NA

MIRL Rwy 14-32