

WAAS
CH **86540**
W27A

APP CRS
274°

Rwy Ldg
TDZE **1463**
Apt Elev **1465**

RNAV (GPS) RWY 27

PIKE COUNTY/HATCHER FLD (PBX)

RNP APCH - GPS.


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. Circling NA to Rws 2 and 20.

MISSED APPROACH: Climb to 4500 direct CILOM and hold, continue climb-in-hold to 4500.

AWOS-3PT 121.225	INDIANAPOLIS CENTER 126.575 257.85	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

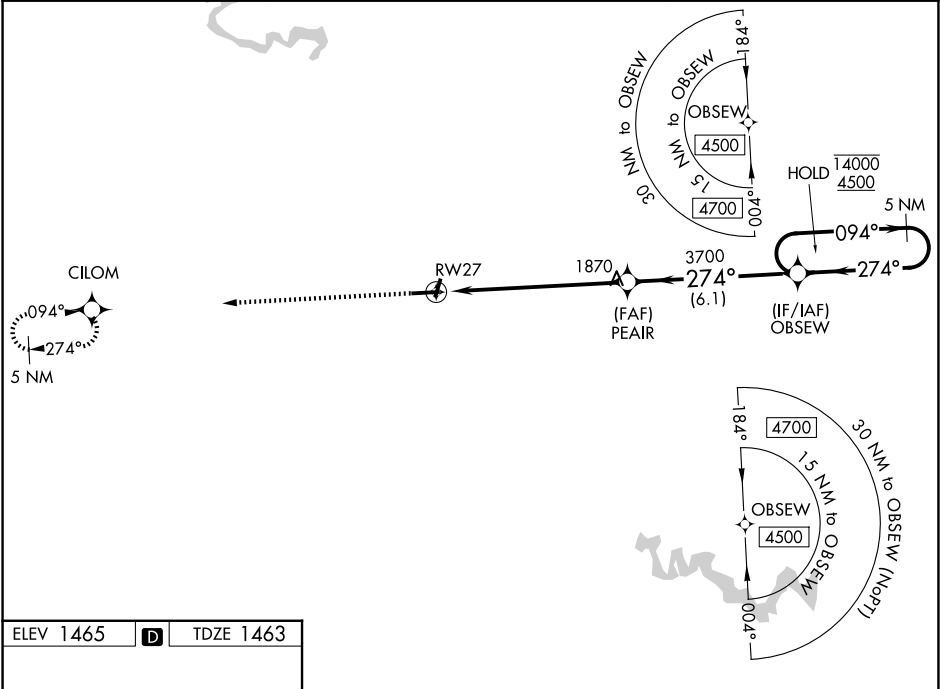

ELEV 1465	D	TDZE 1463
-----------	----------	-----------



4500		CILOM	OBSEW		5 NM Holding Pattern
3700		PEAR	3700		094° → 14000 ← 274° 4500
1.9 NM to RW27			3700		GP 3.00° TCH 47
1.9		5 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	1722-1		259 (300-1)		
LNAV/VNAV DA	2120-1 ⅞		657 (700-1 ⅞)		
LNAV MDA	2120-1 657 (700-1)		2120-1 ⅞ 657 (700-1 ⅞)		
CIRCLING	2120-1 655 (700-1)	2180-1 715 (800-1)	2180-2 715 (800-2)	2460-3 995 (1000-3)	

HIRL Rwy 9-27 0
REIL Rws 9 and 27 0