

WAAS CH 42909 W36A	APP CRS 359°	Rwy Idg TDZE 54 Apt Elev 55
--	------------------------	---

RNAV (GPS) RWY 36


PICAYUNE MUNI (MJD)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Stennis Intl altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Procedure NA when R-4403 A, B, C, or E is active. When local altimeter setting not received, use Stennis Intl altimeter setting: increase LPV DA to 338 and all Cats visibility ½ mile; increase LNAV/VNAV DA to 374 and all Cats visibility ½ mile; increase all MDA 40 feet and LNAV Cats C and D visibility ½ mile, and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 1800 direct CIQYI and hold.

AWOS-3PT 119.075	GULFPORT APP CON ★ 124.6 354.1	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

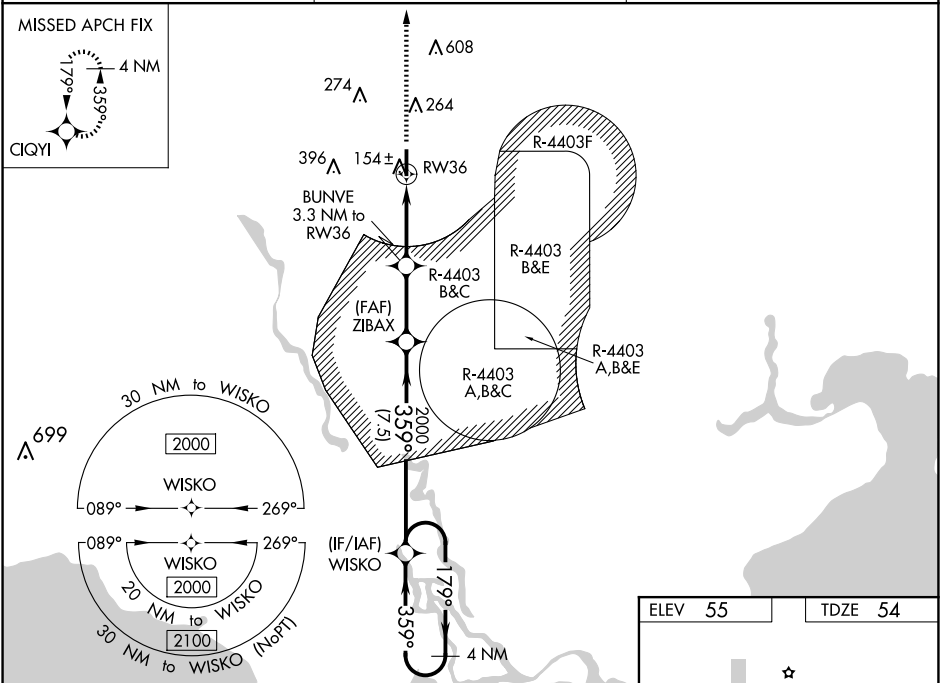

1800	CIQYI				
*LNAV only.					