

WAAS CH 68560 W34B	APP CRS 340°	Rwy Idg TDZE 4529 Apt Elev 4534
--	------------------------	---

RNAV (GPS) RWY 34

ROGERS FLD (005)

RNP APCH - GPS.

▼



When local altimeter setting not received, procedure NA.

▲

Rwy 34 helicopter visibility reduction below ¾ SM NA.
Circling NA for Cat C west of Rwy 16-34. Circling NA at night.

MISSED APPROACH: (Do not exceed 165K until initial turn completion) Climb to 5200 then climbing right turn to 10500 direct CHOTT and hold, continue climb-in-hold to 10500.
*Missed approach requires a minimum climb of 377 feet per NM to 7680 feet.

AWOS-3 118.275	OAKLAND CENTER 132.2 350.3	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	--

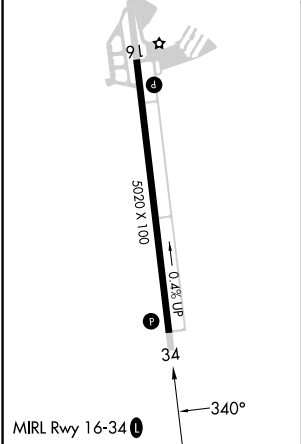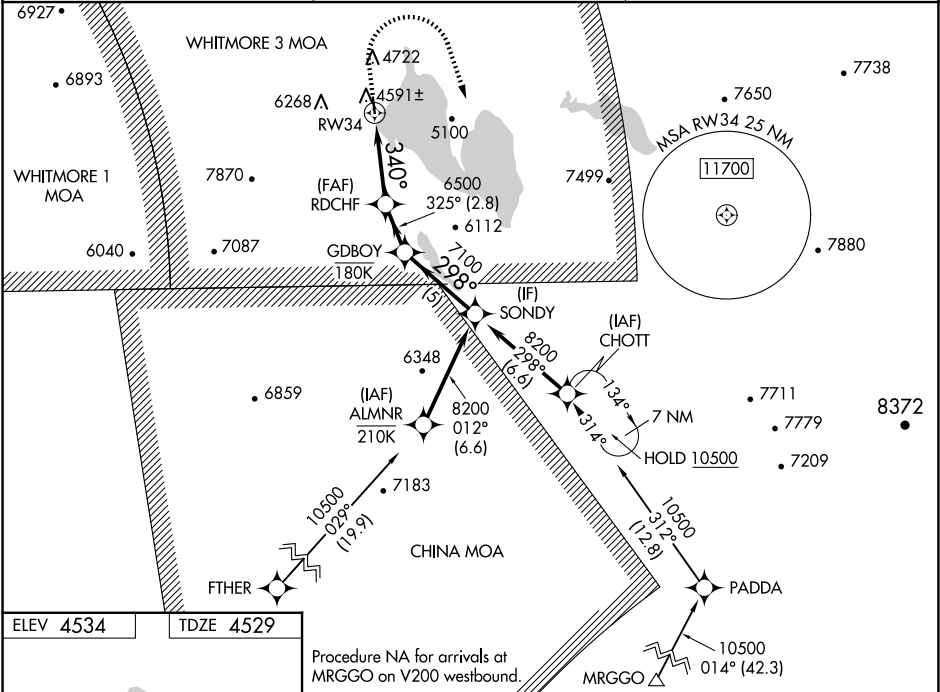

5200 ↑					10500 ↗					CHOTT ✦					VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32)					SONDY				
					1.9 NM to RW34					RDCHF 6500					GDBOY 7100					8200				
					1.9 NM					3 NM					2.8 NM					5 NM				
CATEGORY		A			B			C			D													
LPV DA*		4779-¾			250 (300-¾)			4829-7/8 300 (300-7/8)			NA													
LNNAV MDA*		5160-1			631 (700-1)			5160-1¾ 631 (700-1¾)			NA													
LNNAV MDA		5360-1 831 (900-1)			5360-1¼ 831 (900-1¼)			5360-2½ 831 (900-2½)			NA													
CIRCLING		5440-1¼ 906 (1000-1¼)			5660-1½ 1126 (1200-1½)			5660-3 1126 (1300-3)			NA													