WAAS CH **42825** **W10A**	APP CRS **096°**	Rwy ldg **3000** TDZE **7** Apt Elev **7**

RNAV (GPS) RWY 10
MIAMI HOMESTEAD GENERAL AVIATION (X51)

T NA

Baro-VNAV NA when using Miami Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Exec altimeter setting: increase LPV DA to 284; increase LNAV/VNAV DA to 284; increase all MDA 40 feet.

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct HOLMU and hold.

AWOS-3	MIAMI APP CON	UNICOM
118.375	**125.5 354.1**	**122.8** (CTAF)

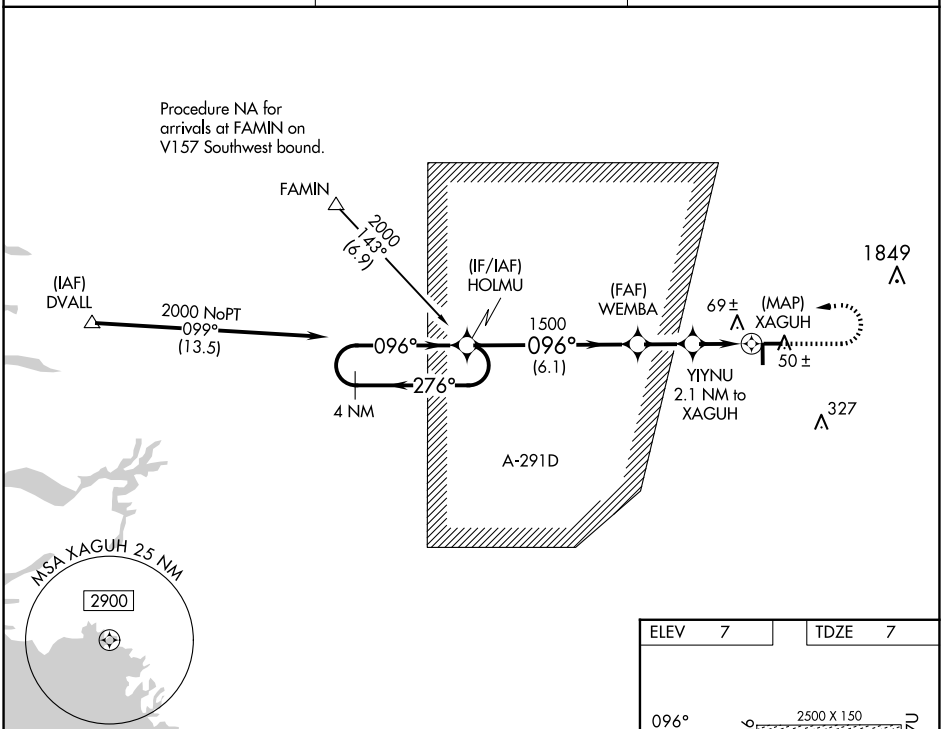

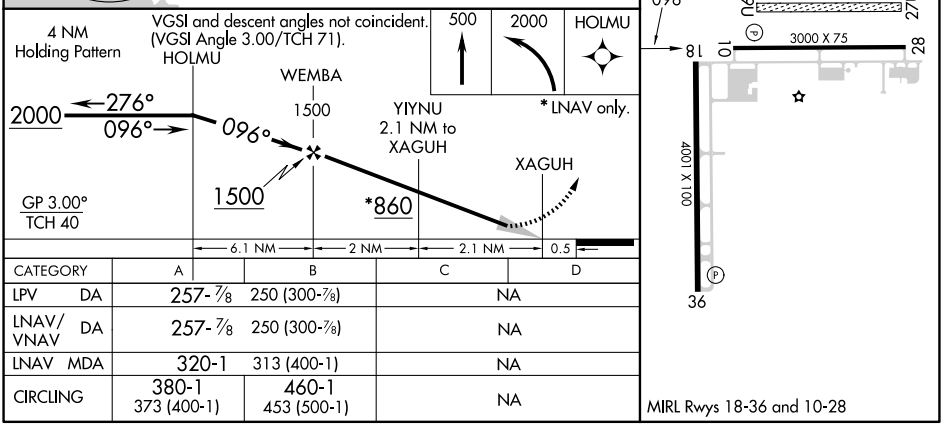

CATEGORY	A	B	C	D
LPV DA	257-⅞	250 (300-⅞)	NA	
LNAV/VNAV DA	257-⅞	250 (300-⅞)	NA	
LNAV MDA	320-1	313 (400-1)	NA	
CIRCLING	380-1 373 (400-1)	460-1 453 (500-1)	NA	

MIRL Rwys 18-36 and 10-28

SE-3, 30 OCT 2025 to 27 NOV 2025

SE-3, 30 OCT 2025 to 27 NOV 2025